

POLAR | Bollard Lights




The bollard light is a contemporary lighting solution designed to illuminate pathways, gardens, and landscape areas with style and safety in mind. With a robust, weather-resistant body and modern aesthetic, this fixture provides soft, glare-free illumination to guide pedestrians and enhance the visual appeal of outdoor spaces.

Technical Details

Power : 12W
CCT : 3000K 4000K 6500K
CRI : 80
Beam Angle : Asymmetric
Lumen Output : 1440lm
Input Voltage : AC 220-240V
Driver : 1-10V Dali
Material : Aluminum Injection Body
Finishing Color : Black Grey
Reflector : PC PMMA Lens
Size : H 1000mm
Cut out : Ø16mm
IP Rating : IP66

Light Distribution

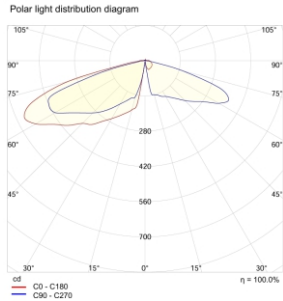


Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
BL-Polar-TA08	12W	1440lm	3000K 4000K 6500K	80	Asymmetric	Black White	H 1000mm	

CLUSTER | Bollard Lights

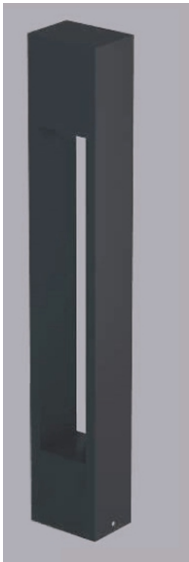


The bollard light is a contemporary lighting solution designed to illuminate pathways, gardens, and landscape areas with style and safety in mind. With a robust, weather-resistant body and modern aesthetic, this fixture provides soft, glare-free illumination to guide pedestrians and enhance the visual appeal of outdoor spaces.



Technical Details

Power : 12W
CCT : 3000K 4000K 6500K
CRI : 80
Beam Angle : Asymmetric
Lumen Output : 1440lm
Input Voltage : AC 220-240V
Driver : 1-10V Dali
Material : Aluminum Injection Body
Finishing Color : Black Grey
Reflector : PC PMMA Lens
Size : H 1000mm
Cut out : Ø16mm
IP Rating : IP66

Light Distribution

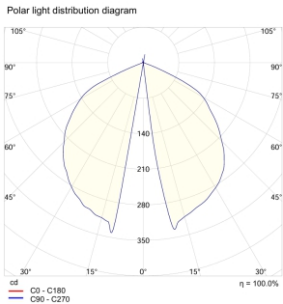


Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
BL-Cluster-TA08	12W	1440lm	3000K 4000K 6500K	80	Asymmetric	Black White	H 1000mm	

RADIAL | Bollard Lights




The bollard light is a contemporary lighting solution designed to illuminate pathways, gardens, and landscape areas with style and safety in mind. With a robust, weather-resistant body and modern aesthetic, this fixture provides soft, glare-free illumination to guide pedestrians and enhance the visual appeal of outdoor spaces.

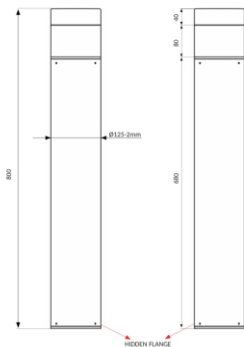


Technical Details

Power : 12W
CCT : 4000K
CRI : 80
Beam Angle : 150°
Lumen Output : 1660lm
Input Voltage : AC 220-240V
Material : Aluminum
Finishing Color : Black
Size : Ø125 x H800mm
Cut out : Ø16mm
IP Rating : IP65

Light Distribution

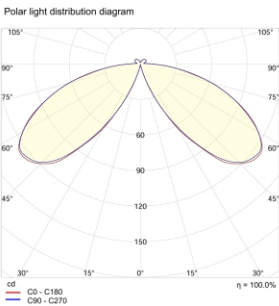

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
BL-Radial-TA08	12W	1660lm	4000K	80	150°	Black	Ø125 x H800mm	




The bollard light is a contemporary lighting solution designed to illuminate pathways, gardens, and landscape areas with style and safety in mind. With a robust, weather-resistant body and modern aesthetic, this fixture provides soft, glare-free illumination to guide pedestrians and enhance the visual appeal of outdoor spaces.

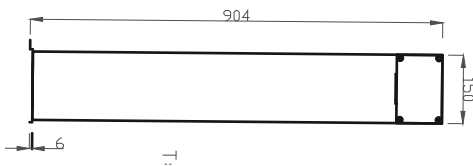

Technical Details

Power : 25W
CCT : 2700K 3000K 4000K 6500K
CRI : 80
Beam Angle : 120°
Lumen Output : 2696lm
Input Voltage : AC 220-240V
Driver : 1-10V Dali
Material : Die cast Aluminum
Finishing Color : Black Grey
Reflector : Polycarbonate
Size : L150 x W275 x H904mm
IP Rating : IP65

Light Distribution

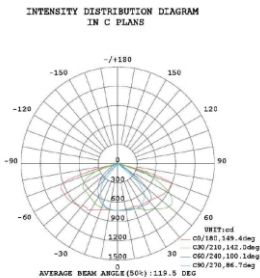

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
BL-Ayla-DC09	25W	2696lm	2700K 3000K 4000K 6500K	80	120°	Black Grey	L150 x W275 x H904mm	

AYLA 2 | Bollard Lights




The bollard light is a contemporary lighting solution designed to illuminate pathways, gardens, and landscape areas with style and safety in mind. With a robust, weather-resistant body and modern aesthetic, this fixture provides soft, glare-free illumination to guide pedestrians and enhance the visual appeal of outdoor spaces.

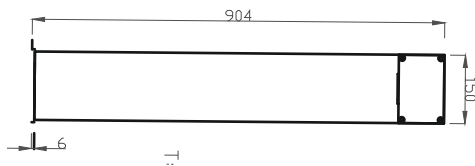

Technical Details

Power : 25W
CCT : 2700K 3000K 4000K 6500K
CRI : 80
Beam Angle : 120°
Lumen Output : 3235lm
Input Voltage : AC 220-240V
Driver : 1-10V Dali
Material : Die cast Aluminum
Finishing Color : Black Grey
Reflector : Polycarbonate
Size : L150 x W450 x H904mm
IP Rating : IP65

Light Distribution

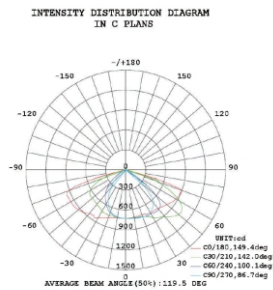

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
BL-Ayla2-DC09	25W	3235lm	2700K 3000K 4000K 6500K	80	120°	Black Grey	L150 x W450 x H904mm	

LUNA | Bollard Lights



The bollard light is a contemporary lighting solution designed to illuminate pathways, gardens, and landscape areas with style and safety in mind. With a robust, weather-resistant body and modern aesthetic, this fixture provides soft, glare-free illumination to guide pedestrians and enhance the visual appeal of outdoor spaces.

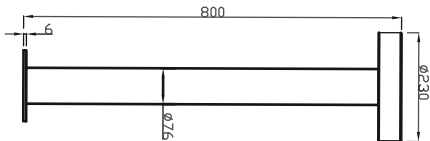


Technical Details

Power : 30W
CCT : 2700K 3000K 4000K 6500K
CRI : 80
Beam Angle : 360°
Lumen Output : 2091lm
Input Voltage : AC 220-240V
Driver : 1-10V Dali
Material : Die cast Aluminum
Finishing Color : Black Silver
Reflector : Anti-UV Polycarbonate
Size : Ø230 x H800mm
IP Rating : IP65

Light Distribution

Distribution:

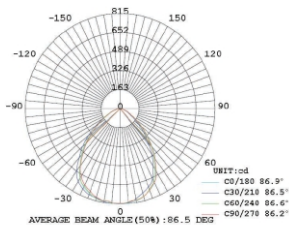

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
BL-Luna-DC09	30W	2091lm	2700K 3000K 4000K 6500K	80	360°	Black Silver	Ø230 x H800mm	

HORIZON | Bollard Lights



The bollard light is a contemporary lighting solution designed to illuminate pathways, gardens, and landscape areas with style and safety in mind. With a robust, weather-resistant body and modern aesthetic, this fixture provides soft, glare-free illumination to guide pedestrians and enhance the visual appeal of outdoor spaces.

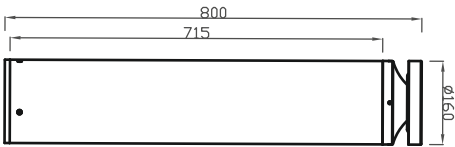


Technical Details

Power : 25W
CCT : 2700K 3000K 4000K 6500K
CRI : 80
Beam Angle : 360°
Lumen Output : 1500lm
Input Voltage : AC 220-240V
Driver : 1-10V Dali
Material : Die cast Aluminum
Finishing Color : Black Silver
Reflector : Anti-UV Polycarbonate
Size : Ø160 x H800mm
IP Rating : IP65

Light Distribution

Distribution:

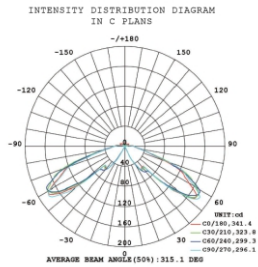

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
BL-Horizon-DC09	25W	1500lm	2700K 3000K 4000K 6500K	80	360°	Black Silver	Ø160 x H800mm	