



CAPELLA | Ceiling Mounted Downlights



Ultra-thin square ceiling light.
High-lumen SMD LED, better heat
resistance and corrosion resistance.



Technical Details

Power : 15W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 110°

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : Triac

Material : Polycarbonate

Finishing Color : White


Reflector : PMMA

Size : L300 x W300 x H33mm


Cut out : -

IP Rating : IP20

Light Distribution



Light Performance

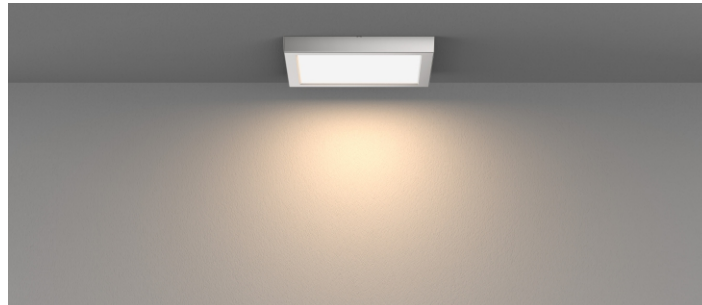


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SM-Capella-US01	15W	100lm	3000K 4000K 5000K	90	110°	White	L300 x W300 x H33mm	

MIRZAM | Ceiling Mounted Downlights



Surface Mounted Downlight series with anti glare reflector to reach UGR>19. Aluminum housing to assure a better thermal management.



Technical Details

Power : 8W | 14W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 30° | 40°

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : Triac | DALI

Material : Die Cast Aluminium

Finishing Color : White | Black

Reflector : White | Black | Silver


Size : L95 x W95 x H125mm

Cut out : -

IP Rating : IP20

Light Distribution

Polar light distribution diagram



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SM-Mirzam-US	8W 14W	100lm	3000K 4000K 5000K	90	30° 40°	White Black	L95 x W95 x H125mm	

AQUILA | Ceiling Mounted Downlights



Surface mounted Downlight adopting a design with a stylish appearance. Aluminum body with oxidation treatment provides corrosion resistance and excellent heat dissipation performance.

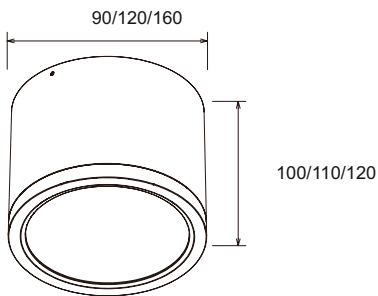

Technical Details

Power : 10W | 15W | 25W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 24° | 45° | 60°

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : -

Material : Aluminium

Finishing Color : White | Black


Reflector : Silver

Size : Ø90 x H100mm | Ø120 x H110mm | Ø160 x H120mm

Cut out : -

IP Rating : IP54 | IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SM-Aquila-US01	10W 15W 25W	100lm	3000K 4000K 5000K	90	24° 45° 60°	White Black	Ø90 x H100mm Ø120 x H110mm Ø160 x H120mm	

POLARIS | Ceiling Mounted Downlights



Surface mounted Downlight with a simple design. The finish is high quality with amazing high resistance body in a tested conditions.



Technical Details

Power : 10W

CCT : 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 24° | 36° | 60°

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : -

Material : Die cast Aluminium

Finishing Color : White | Black

Reflector : Silver




Size : Ø90 x H120mm

Cut out : -

IP Rating : IP65

Light Distribution

Light Distribution



Light Performance





Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SM-Polaris-LS02	10W	100lm	3000K 4000K 6000K	90	24° 36° 60°	White Black	Ø90 x H120mm	

CANOPUS | Ceiling Mounted Downlights



Surface mounted Downlight with a simple design. The finish is high quality with amazing high resistance body in a tested conditions.



Technical Details

Power : 10W

CCT : 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 24° | 36° | 60°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver : -

Material : Die cast Aluminium

Finishing Color : White | Black

Reflector : Silver


Size : L90 x W90 x H120mm

Cut out : -




IP Rating : IP65

Light Distribution


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SM-Canopus-LS02	10W	80lm	3000K 4000K 6000K	90	24° 36° 60°	White Black	L90 x W90 x H120mm	

UPSILON | Ceiling Mounted Downlights



High light transmittance and durable surface mounted light. Housing and diffuser made of polycarbonate.



Technical Details

Power : 18W

CCT : 3000K | 4000K | 6000K

CRI : 80

Beam Angle : 120°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver : Triac

Material : Polycarbonate

Finishing Color : White | Black | Grey


Reflector : Polycarbonate

Size : Ø280 x H48mm

Cut out : -

IP Rating : IP54

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SM-Upsilon-YY11	18W	80lm	3000K 4000K 6000K	80	120°	White Black Grey	Ø280 x H48mm	

UPSILON-SQ | Ceiling Mounted Downlights



High light transmittance and durable surface mounted light. Housing and diffuser made of polycarbonate.



Technical Details

Power : 18W

CCT : 3000K | 4000K | 6000K

CRI : 80

Beam Angle : 120°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver : Triac

Material : Polycarbonate

Finishing Color : White | Black | Grey


Reflector : Polycarbonate

Size : L280 x W280 x H48mm


Cut out : –

IP Rating : IP54

Light Distribution



Light Performance

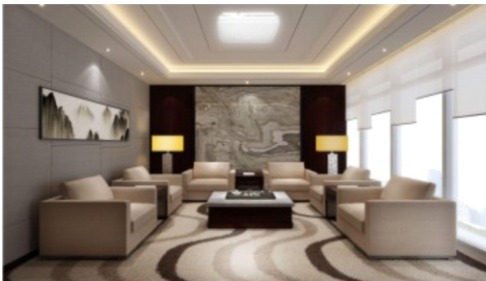

Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SM-UpsilonSQ-YY11	18W	80lm	3000K 4000K 6000K	80	120°	White Black Grey	L280 x W280 x H48mm	

CHARON | Ceiling Mounted Downlights



High light transmittance and durable surface mounted light. Housing and diffuser made of polycarbonate.

Technical Details

Power : 18W

CCT : 3000K | 4000K | 6000K

CRI : 80

Beam Angle : 120°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver : -

Material : Polycarbonate


Finishing Color : White | Black | Grey

Reflector : Polycarbonate


Size : Ø280 x H57mm

Cut out : -


IP Rating : IP54

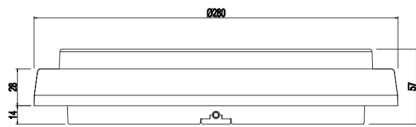

Light Distribution



Light Performance





Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SM-Charon-YY11	18W	80lm	3000K 4000K 6000K	80	120°	White Black Grey	Ø280 x H57mm	

CHARON-SQ | Ceiling Mounted Downlights



High light transmittance and durable surface mounted light. Housing and diffuser made of polycarbonate.



Technical Details

Power : 18W

CCT : 3000K | 4000K | 6000K

CRI : 80

Beam Angle : 120°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver : –

Material : Polycarbonate

Finishing Color : White | Black | Grey


Reflector : Polycarbonate

Size : L280 x W280 x H57mm


Cut out: —

IP Rating : IP54

Light Distribution



Light Performance

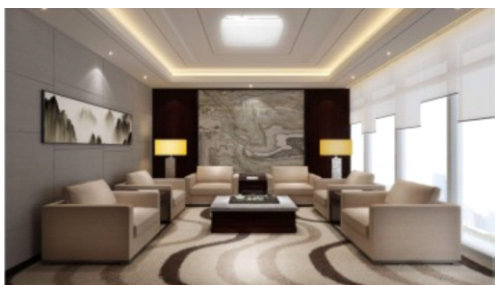

Order Options

<u>Model Code</u>	<u>Power</u>	<u>Lumens</u>	<u>CCT</u>	<u>CRI</u>	<u>Beam</u>	<u>Finish</u>	<u>Size</u>	<u>Accessories</u>
SM-Charon-YY11	18W	80lm	3000K 4000K 6000K	80	120°	White Black Grey	L280 x W280 x H57mm	