



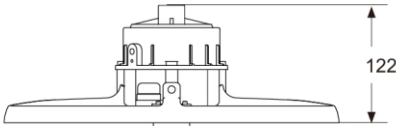

Iris is a remarkable advancement in the world of industrial lighting, breaking free from the era of indistinguishable UFO highbays. By harnessing cutting-edge aluminum die-casting and advanced optical lens technology, Iris delivers a long-sought solution in industrial lighting—achieving high lumen output, exceptional efficiency, uniform light distribution, and minimal glare—all in one sleek, high-performance fixture.



Technical Details

Power : 100W | 120W | 150W | 200W

CCT : 3000K | 4000K | 5000K | 5700K

CRI : >80

Beam Angle : 120°

Lumen Output : 160lm/W

Input Voltage : AC 100-240V

Material : Die Cast Aluminium

Finishing Color : White | Black


Reflector : Polycarbonate

Size : Ø400 x H122mm

IP Rating : IP65

Accessories : Sensor

Light Distribution



Light Performance




Order Options

| Model Code   | Power                        | Lumens | CCT                              | CRI | Beam | Finish         | Size          | Accessories |
|--------------|------------------------------|--------|----------------------------------|-----|------|----------------|---------------|-------------|
| HB-Iris-SH08 | 100W<br>120W<br>150W<br>200W | 160lm  | 3000K<br>4000K<br>5000K<br>5700K | >80 | 120° | White<br>Black | Ø400 x H122mm | Sensor      |

## HEBE | Highbay



Hebe is an elegantly looking linear bay light fixture. A clever structural design by combining 3 extruded aluminum profiles in the way of jigsaw to form 3 isolated chambers, that renders excellent heat management, efficient space utilization, cost efficient, and high structural strength.



### Technical Details

Power : 100W | 120W | 150W | 200W

CCT : 3000K | 4000K | 5000K | 5700K

CRI : >80

Beam Angle : 120°

Lumen Output : 120lm/W

Input Voltage : AC 100-240V

Material : Die Cast Aluminium


Finishing Color : Silver

Reflector : Polycarbonate


Size : L560 x W270 x H65mm | L560 x W270 x H65mm  
L620 x W270 x H65mm | L620 x W270 x H65mm  
L700 x W270 x H65mm

IP Rating : IP40

### Light Distribution



### Light Performance

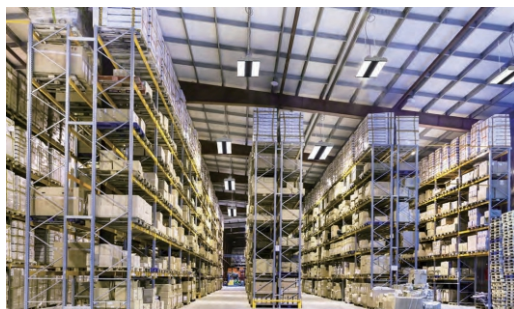


### Order Options

| Model Code   | Power                        | Lumens | CCT                              | CRI | Beam | Finish | Size                                                                                                            | Accessories |
|--------------|------------------------------|--------|----------------------------------|-----|------|--------|-----------------------------------------------------------------------------------------------------------------|-------------|
| HB-Hebe-SH08 | 100W<br>120W<br>150W<br>200W | 120lm  | 3000K<br>4000K<br>5000K<br>5700K | >80 | 120° | Silver | L560 x W270 x H65mm<br>L560 x W270 x H65mm<br>L620 x W270 x H65mm<br>L620 x W270 x H65mm<br>L700 x W270 x H65mm |             |

# HERCULINA | Highbay



Herculina is a new generation high-power modular lighting system. Its innovative design allows for effortless assembly into various configurations, making it suitable for a wide range of applications.

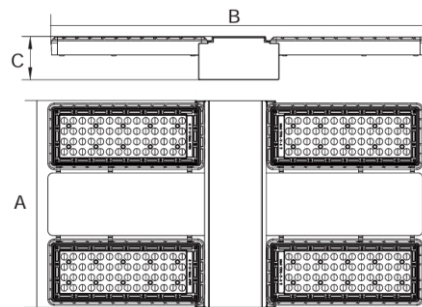

## Technical Details

Power : 160W | 240W | 320W | 480W

CCT : 3000K | 4000K | 5000K | 5700K

CRI : >80

Beam Angle : 150°

Lumen Output : 190lm/W

Input Voltage : AC 100-277V

Material : Die Cast Aluminium

Finishing Color : White | Black


Driver : DALI

Size : L553 x W500 x H104 | L553 x W500 x H104  
L910 x W500 x H104 | L910 x W500 x H104

IP Rating : IP65

## Light Distribution

Polar light distribution diagram



## Light Performance




## Order Options

| Model Code        | Power                        | Lumens | CCT                              | CRI | Beam | Finish         | Size                                                                                 | Accessories |
|-------------------|------------------------------|--------|----------------------------------|-----|------|----------------|--------------------------------------------------------------------------------------|-------------|
| HB-Herculina-SH08 | 160W<br>240W<br>320W<br>480W | 190lm  | 3000K<br>4000K<br>5000K<br>5700K | >80 | 150° | White<br>Black | L553 x W500 x H104<br>L553 x W500 x H104<br>L910 x W500 x H104<br>L910 x W500 x H104 |             |



Palma is designed with the concept of "Modern Technology in a Classic Look." Its aesthetically refined appearance makes it a harmonious lighting solution that seamlessly integrates with various architectural styles. Ideal for spaces requiring high lumen output—such as shopping malls, canteens, churches, halls, office buildings, and showrooms - Palma combines timeless design with advanced performance.



## Technical Details

Power : 80W | 120W

CCT : 3000K | 4000K | 5000K | 5700K

CRI : >80

Beam Angle : 90°

Lumen Output : 130lm/W

Input Voltage : AC 100-240V

Material : Die Cast Aluminium

Finishing Color : White | Black | Silver


Reflector : Polycarbonate

Size : Ø410 x H289mm

IP Rating : IP65

## Light Distribution

Polar light distribution diagram



## Light Performance




## Order Options

| Model Code    | Power       | Lumens | CCT                              | CRI | Beam | Finish                   | Size          | Accessories |
|---------------|-------------|--------|----------------------------------|-----|------|--------------------------|---------------|-------------|
| HB-Palma-SH08 | 80W<br>120W | 130lm  | 3000K<br>4000K<br>5000K<br>5700K | >80 | 90°  | White<br>Black<br>Silver | Ø410 x H289mm |             |



This canopy light has a slim and low profile design which provides safe and a visually appealing lighting experience. Quick mount structure for contractors to work safely and easily in the confined-space areas. It is a perfect solution to replace 150 metal halide lamp with a benefit of low maintenance cost.

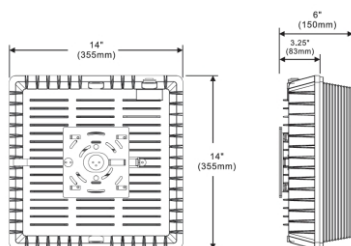

## Technical Details

Power : 88W | 118W

CCT : 5000K

CRI : >80

Beam Angle : 90°

Lumen Output : 120lm/W

Input Voltage : AC 100-277V

Material : Die Cast Aluminium


Finishing Color : Bronze

Reflector : Polycarbonate

Size : L355 x W355 x H150mm

IP Rating : IP65

## Light Distribution



## Light Performance

## Order Options

| Model Code      | Power       | Lumens | CCT   | CRI | Beam | Finish | Size                 | Accessories |
|-----------------|-------------|--------|-------|-----|------|--------|----------------------|-------------|
| HB-Eunomia-GR17 | 88W<br>118W | 120lm  | 5000K | >80 | 90°  | Bronze | L355 x W355 x H150mm |             |