


MICRONOVA | Linear Inground Lights



Linear Inground Lights are sleek and robust luminaires designed for seamless integration into outdoor landscapes and architectural pathways. Constructed with high-grade corrosion-resistant materials and toughened glass, these fixtures provide durable and reliable performance under harsh weather conditions and heavy pedestrian or vehicular traffic.

Technical Details

Power : 36W | 48W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow
Green | Blue | Red | Amber | RGBW | RGB

CRI : 80

Beam Angle : 10° | 15° | 30° | 45° | 60° |
10°x60° | 20°x40°

Lumen Output : 2850lm | 3750lm

Input Voltage : DC 24V

Driver : 0-10V | Dali | DMX

Material : Aluminum


Finishing Color : Black | Grey | White

Reflector : Tempered Glass


Size : L1000 x W53 x H112mm

IP Rating : IP67

Accessories : Sleeve

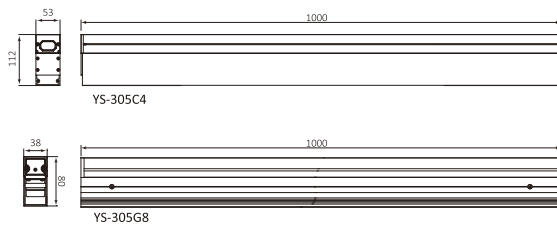

Light Distribution

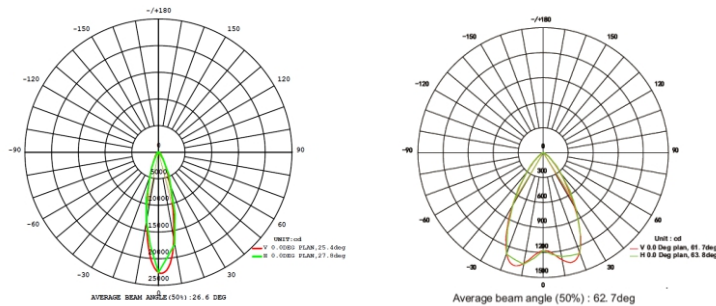

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LI-Micronova-YL01	36W 48W	2850lm 3750lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber RGB	90	10° 15° 30° 45° 60° 10°x60° 20°x40°	Black White Grey	L1000 x W53 x H112mm	Sleeve

NOVA | Linear Inground Lights




Linear Inground Lights are sleek and robust luminaires designed for seamless integration into outdoor landscapes and architectural pathways. Constructed with high-grade corrosion-resistant materials and toughened glass, these fixtures provide durable and reliable performance under harsh weather conditions and heavy pedestrian or vehicular traffic.



Technical Details

Power : 18W 24W 30W
CCT : 2700K 3000K 4000K 6500K Yellow Green Blue Red Amber RGBW RGB
CRI : 80
Beam Angle : 10° 15° 30° 45° 60° 10°x60° 20°x40°
Lumen Output : 1250lm 1650lm 2050lm
Input Voltage : DC 24V
Driver : 0-10V Dali DMX
Material : Aluminum
Finishing Color : Black Grey
Reflector : Tempered Glass
Size : L1000 x W56 x H93mm
IP Rating : IP67
Accessories : Sleeve

Light Distribution

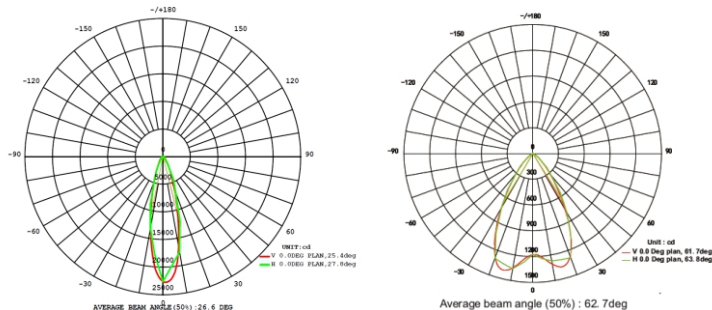

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LI-Nova-YL01	18W 24W 30W	1250lm 1650lm 2050lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber RGB	90	10° 15° 30° 45° 60° 10°x60° 20°x40°	Black Grey	L1000 x W56 x H93mm	Sleeve

SUPERNOVA | Linear Inground Lights



Linear Inground Lights are sleek and robust luminaires designed for seamless integration into outdoor landscapes and architectural pathways. Constructed with high-grade corrosion-resistant materials and toughened glass, these fixtures provide durable and reliable performance under harsh weather conditions and heavy pedestrian or vehicular traffic.

Technical Details

Power : 18W | 24W | 36W | 54W | 60W | 72W | 80W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow
Green | Blue | Red | Amber | RGBW | RGB

CRI : 80

Beam Angle : 15° | 30° | 45° | 60° | Asymmetric

Lumen Output : 1250lm | 1650lm | 2500lm |
3780lm | 4200lm | 5040lm | 5400lm

Input Voltage : AC 100-240V

Driver : 0-10V | Dali | DMX

Material : Aluminum


Finishing Color : Black | Silver | White | Bronze

Reflector : Tempered Glass


Size : L1000 x W90 x H111mm |
L1000 x W120 x H120mm

IP Rating : IP67


Accessories : Sleeve

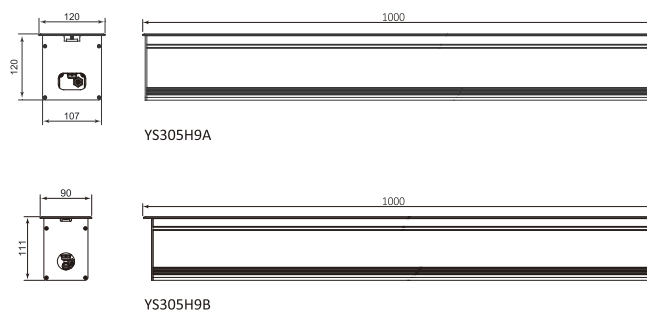

Light Distribution

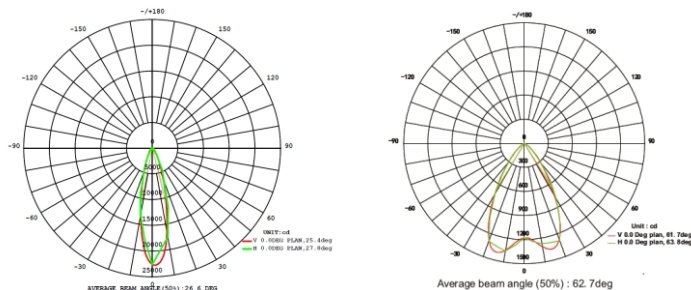


Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LI-Supernova-YL01	18W	1250lm	2700K	90	15°	Black	L1000 x W90 x H111mm L1000 x W120 x H120mm	Sleeve
	24W	1650lm	3000K		30°	Grey		
	36W	2500lm	4000K		45°	White		
	54W	3780lm	6500K		60°	Bronze		
	60W	4200lm	RED		Asymmetric			
	72W	5040lm	GREEN					
	80W	5400lm	BLUE					
			RGBW					
			Amber					
			RGB					

ORBIT | Linear Inground Lights




Linear Inground Lights are sleek and robust luminaires designed for seamless integration into outdoor landscapes and architectural pathways. Constructed with high-grade corrosion-resistant materials and toughened glass, these fixtures provide durable and reliable performance under harsh weather conditions and heavy pedestrian or vehicular traffic.

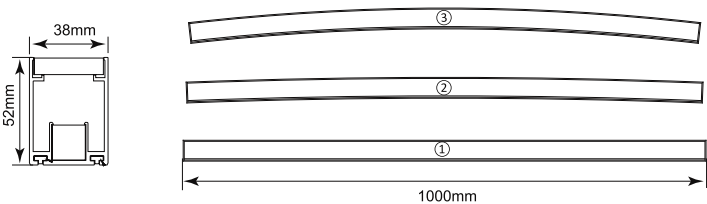

Technical Details

Power : 18W
CCT : 2700K 3000K 4000K 6500K Yellow Green Blue Red Amber RGBW RGB
CRI : 80
Beam Angle : 120°
Lumen Output : 650lm
Input Voltage : DC 24V
Driver : 0-10V Dali DMX
Material : Aluminum
Finishing Color : Black Grey White
Reflector : Tempered Glass
Size : L1000 x W38 x H52mm
IP Rating : IP67
Accessories : Sleeve

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LI-Orbit-YL01	18W	650lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber RGB	90	120°	Black Grey White	L1000 x W38 x H52mm	Sleeve