


KRAZ | Linear Profile




A versatile range of linear lights featuring wide-beam, rotationally symmetrical light distribution - ideal for general lighting applications. Designed with low UGR (Unified Glare Rating), making it perfectly suited for offices, schools, workshops, and other indoor environments where visual comfort is essential.

Technical Details

Power : 22W 38W 45W 55W 70W
CCT : 3000K 4000K 6000K
CRI : 90
Beam Angle : 120°
Lumen Output : 100lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Aluminium + Polycarbonate
Finishing Color : White Black Silver
Size : L600 x W38 x H80mm L1200 x W38 x H80mm L1500 x W38 x H80mm L1800 x W38 x H80mm L2400 x W38 x H80mm
IP Rating : IP20



Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LP-Kraz-SD03	22W 38W 45W 55W 70W	100lm	3000K 4000K 6000K	90	120°	White Black Silver	L600 x W38 x H80mm L1200 x W38 x H80mm L1500 x W38 x H80mm L1800 x W38 x H80mm L2400 x W38 x H80mm	

SYLVIA | Linear Profile




A versatile range of linear lights featuring wide-beam, rotationally symmetrical light distribution - ideal for general lighting applications. Designed with low UGR (Unified Glare Rating), making it perfectly suited for offices, schools, workshops, and other indoor environments where visual comfort is essential.

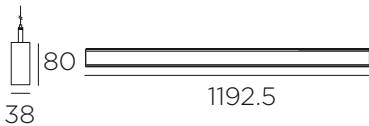

Technical Details

Power : 38W 45W 55W 70W
CCT : 3000K 4000K 6000K
CRI : 90
Beam Angle : 15° 30° 45°
Lumen Output : 75lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Aluminium + Polycarbonate
Finishing Color : White Black Silver
Size : L1200 x W38 x H80mm L1500 x W38 x H80mm L1800 x W38 x H80mm L2400 x W38 x H80mm
IP Rating : IP20

Light Distribution




Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LP-Sylvia-SD03	22W 38W 45W 55W 70W	75lm	3000K 4000K 6000K	90	120°	White Black Silver	L600 x W38 x H80mm L1200 x W38 x H80mm L1500 x W38 x H80mm L1800 x W38 x H80mm	 

DAVIDA | Linear Profile



Davida is a refined lighting system that combines a sleek line of light with a thin metal sheet to deliver soft yet effective illumination. Designed to emphasize the beauty of reflected light, its clean, minimal forms are available in multiple formats and finishes—merging aesthetic elegance with functional performance.

Technical Details

Power : 16W | 18W | 24W | 28W | 30W | 36W

CCT : 2700K | 3000K | 4000K | 6000K

CRI : 90

Beam Angle : 24° | 50°

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI


Material : Aluminium

Finishing Color : White | Black | Silver | Gold


Reflector : Aluminium

Size : L1010 x W27 x H35mm | L1250 x W27 x H35mm
L1500 x W27 x H35mm | L1850 x W27 x H35mm
L1970 x W27 x H35mm | L2350 x W27 x H35mm


IP Rating : IP20

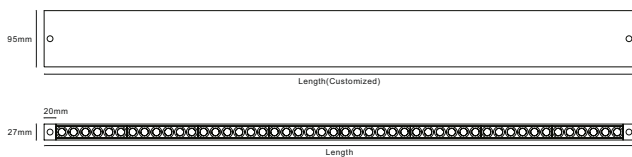

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LP-Davida-HL14	16W 18W 24W 28W 30W 36W	100lm	2700K 3000K 4000K 6000K	90	24° 50°	White Black Silver Gold	L1010 x W27 x H35mm L1250 x W27 x H35mm L1500 x W27 x H35mm L1850 x W27 x H35mm L1970 x W27 x H35mm L2350 x W27 x H35mm	

HEKTOR | Linear Profile



Hektor is a refined pendant lighting system that celebrates the beauty of reflected light. Featuring a slender metal sheet and a gracefully curved reflector, it offers a delicate balance between structure and softness. The fixture's indirect illumination provides a warm, glare-free ambiance.

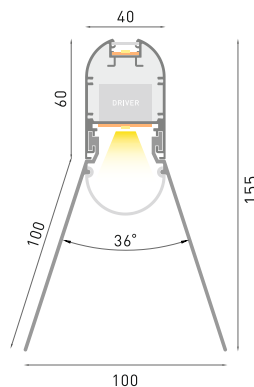

Technical Details

Power : 10W | 15W | 20W

CCT : 2700K | 3000K | 4000K | 6000K

CRI : 90

Beam Angle : 36° | 40°

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminium

Finishing Color : White | Black | Silver | Gold



Reflector : Aluminium

Size : L1000 x W100 x H155mm |
L1500 x W100 x H155mm |
L2000 x W100 x H155mm

IP Rating : IP20

Accessories : Ceiling Box | Suspension Cable

Light Distribution




Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LP-Hektor-HL14	10W 15W 20W	100lm	2700K 3000K 4000K 6000K	90	36° 40°	White Black Silver Gold	L1000 x W100 x H155mm L1500 x W100 x H155mm L2000 x W100 x H155mm	Ceiling Box Suspension Cable

JUNO | Linear Profile

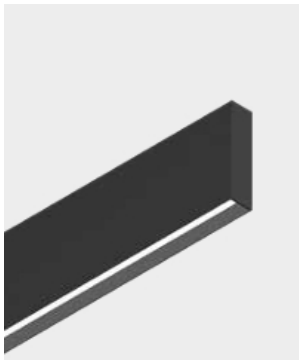


Suspended LED luminaire with a sleek, contemporary profile. Designed with an innovative anti-glare optical system, Juno ensures visual comfort and reduces eye strain, making it ideal for prolonged use in workspaces, educational environments, or residential interiors. Its modern, minimalist form brings elegance to any setting while delivering efficient and uniform illumination.

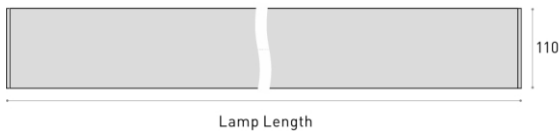

Technical Details

Power : 10W 15W 20W
CCT : 2700K 3000K 4000K 6000K
CRI : 90
Beam Angle : 100° 70°
Lumen Output : 100lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Aluminium
Finishing Color : White Black Silver Gold
Reflector : Aluminium
Size : L1000 x W26 x H110mm L1500 x W26 x H110mm L2000 x W26 x H110mm
IP Rating : IP20

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LP-Juno-HL14	10W 15W 20W	100lm	2700K 3000K 4000K 6000K	90	100° 70°	White Black Silver Gold	L1000 x W26 x H110mm L1500 x W26 x H110mm L2000 x W26 x H110mm	

CAMILLA | Linear Profile



Recessed LED luminaire with modern, minimalist form bringing elegance to any setting while providing a warm, glare-free ambiance.

Technical Details

Power : 20W | 25W | 30W | 36W | 40W

CCT : 2700K | 3000K | 4000K | 6000K

CRI : 90

Beam Angle : 12° | 24° | 38° | 50°

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminium



Finishing Color : White | Black | Silver

Reflector : Aluminium


Size : L955 x W56 x H33mm |
L1222 x W56 x H33mm | L1488 x W56 x H33mm
L1755 x W56 x H33mm | L2022 x W56 x H33mm

IP Rating : IP20


PROFILE SECTION

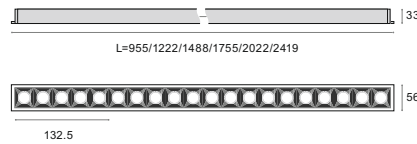

Light Distribution




DORIS | Linear Profile

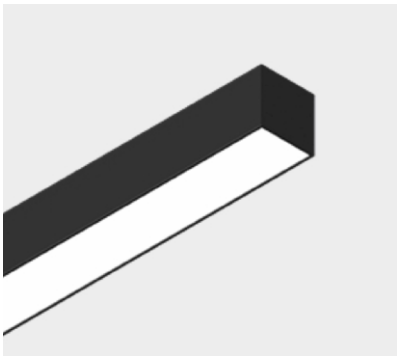

Suspended LED luminaire with a sleek, contemporary profile with IP65 rating. Designed with an innovative anti-glare optical system delivering efficient and uniform illumination.


PROFILE SECTION

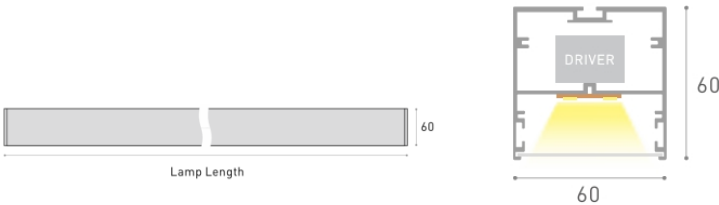

Technical Details

Power : 20W 30W 40W
CCT : 2700K 3000K 4000K 6000K
CRI : 90
Beam Angle : 100° 70°
Lumen Output : 100lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Aluminium
Finishing Color : White Black Silver
Reflector : PC Prismatic
Size : L1000 x W60 x H60mm L1500 x W60 x H60mm L2000 x W60 x H60mm
IP Rating : IP65

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
LP-Doris-HL14	20W 30W 40W	100lm	2700K 3000K 4000K 6000K	90	100° 70°	White Black Silver	L1000 x W60 x H60mm L1500 x W60 x H60mm L2000 x W60 x H60mm	