



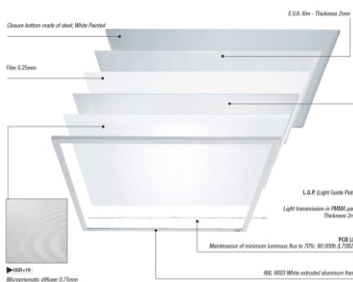

Luminaire for recessed, ceiling or suspended installation designed for a higher glare control. LED Microprismatic diffuser provides UGR<19



Technical Details

Power : 44W

CCT : 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 110°

Lumen Output : 120lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Extruded Aluminum Frame

Finishing Color : White


Reflector : Micro-Prismatic Diffuser

Size : L597 x W597 x H8mm

Cut out : -

IP Rating : IP20 | IP44

Light Distribution



Light Performance





Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PN-Vivano-RL06	44W	120lm	3000K 4000K 6000K	90	110°	White	L597 x W597 x H8mm	

SIRIUS | Panel Lights



LED panel having a direct lighting with high lumen efficiency. Adopt an optical lens to offer a uniform light effect.



Technical Details

Power : 30W

CCT : 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 110°

Lumen Output : 130lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminum Frame

Finishing Color : White


Reflector : PMMA(Lens) + PS(Diffuser)

Size : L59 x W595 x H32mm

Cut out : -

IP Rating : IP40

Light Distribution




Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PN-Sirius-US01	30W	130lm	3000K 4000K 6000K	90	110°	White	L59 x W595 x H32mm	

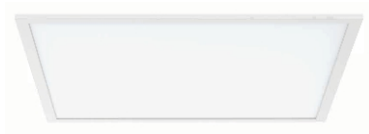

Led panel light solution with strong aluminum frame structure, which offers a great thermal conductivity. It adopts PMMA LGP with high lumen SMD.

Technical Details

Power : 33W

CCT : 3000K | 4000K | 6000K

CRI : >90

Beam Angle : 120°

Lumen Output : 100lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminum Frame


Finishing Color : White

Reflector : PS (diffuser) + PMMA (LGP)


Size : L595 x W595 x H8.5mm

Cut out : L570 x W570mm


IP Rating : IP40



Light Distribution



Light Performance

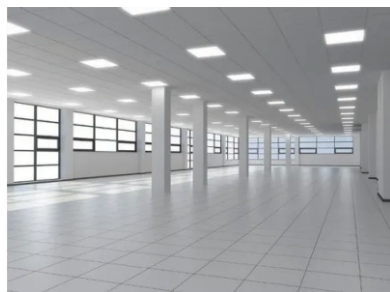


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PN-Leo-US01	33W	100lm	3000K 4000K 6000K	90	120°	White	L595 x W595 x H8.5mm	

REGULUS-30 | Panel Lights



LED panel having a direct lighting with high lumen efficiency.
Uniform light effect with optic lens.
Anti-glare design, UGR<19



Technical Details

Power : 36W

CCT : 3000K | 4000K | 6000K

CRI : 80

Beam Angle : 90°

Lumen Output : 90lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Aluminum Frame

Finishing Color : White


Reflector : PMMA(Lens) + PS(Diffuser)

Size : L295 x W1195 x H32mm

Cut out : -

IP Rating : IP40

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PN-Regulus-US01	36W	90lm	3000K 4000K 6000K	80	90°	White	L295 x W1195 x H32mm	

REGULUS-60 | Panel Lights




LED panel having a direct lighting with high lumen efficiency.
Uniform light effect with optic lens.
Anti-glare design,UGR<19

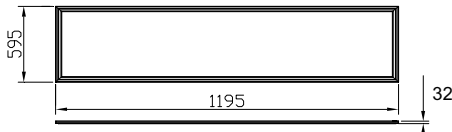


Technical Details

Power : 60W
CCT : 3000K 4000K 6000K
CRI : 80
Beam Angle : 90°
Lumen Output : 90lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Aluminum Frame
Finishing Color : White
Reflector : PMMA(Lens) + PS(Diffuser)
Size : L595 x W1195 x H32mm
Cut out : -
IP Rating : IP40

Light Distribution



Light Performance

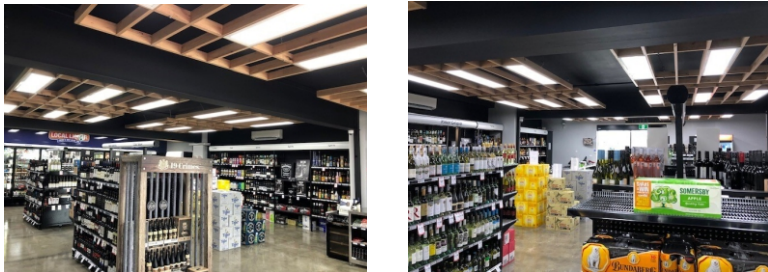


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PN-Regulus60-US01	60W	90lm	3000K 4000K 6000K	80	90°	White	L595 x W1195 x H32mm	

VIVANO INDIRECT | Panel Lights




LED Panel light with dark-light optics for maximum glare reduction. Very Low energy consumption and low temperature ensures longer product life.

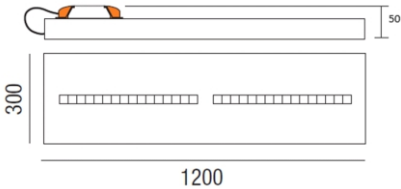

Technical Details

Power : 30W
CCT : 3000K 4000K
CRI : 90
Beam Angle : 110°
Lumen Output : 130lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Aluminum Frame
Finishing Color : White
Reflector : Micro-prismatic Lens
Size : L300 x W1200 x H50mm
Cut out : -
IP Rating : IP20 IP44

Light Distribution




Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PN-Vivano30120-RL06	30W	130lm	3000K 4000K	90	110°	White	L300 x W1200 x H50mm	


VIVANO INDIRECT 6060 | Panel Lights




LED Panel light with dark-light optics for maximum glare reduction. Very Low energy consumption and low temperature ensures longer product life.

Technical Details

Power : 37W
CCT : 3000K 4000K
CRI : 90
Beam Angle : 110°
Lumen Output : 130lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Aluminum Frame
Finishing Color : White
Reflector : Micro-prismatic Lens
Size : L595 x W595 x H50mm
Cut out : -
IP Rating : IP20 IP44



Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PN-Vivano6060-RL06	37W	130lm	3000K 4000K	90	110°	White	L595 x W595 x H50mm	

PEGASUS

| Panel Lights



Module design panel light with high luminous efficacy, featuring PC louver reflectors to help reduce UGR.

36



595


595




Technical Details

Power : 36W
CCT : 3000K 4000K
CRI : 90
Beam Angle : 100°
Lumen Output : 120lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : SPCC
Finishing Color : White
Reflector : Polycarbonate
Size : L595 x W595 x H36mm
Cut out : -
IP Rating : IP40

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PN-Pegasus-US01	36W	120lm	3000K 4000K	90	100°	White	L595 x W595 x H36mm	