


ION | Projector Lights




The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

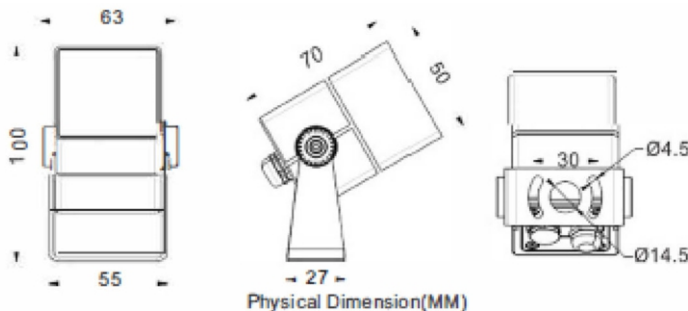

Technical Details

Power : 3W
CCT : 2700K 3000K 4000K 6500K Yellow Green Blue Red Amber RGBW
CRI : 90
Beam Angle : 5° 10° 12° 20° 24° 36° 60° 10°x30°
Lumen Output : 210lm
Input Voltage : DC 24V
Driver : Triac 0-10V Dali DMX 512
Material : Aluminium
Finishing Color : Black White
Reflector : Tempered Glass
Size : L70 x W50 x H100mm
IP Rating : IP66
Accessories : Cowl

Light Distribution

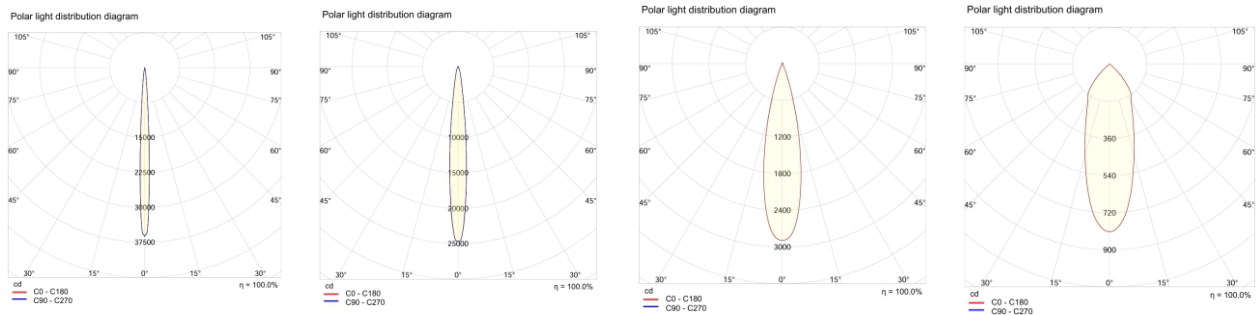

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Ion-BL04	3W	210lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 10° 12° 24° 36° 60° 10°x30°	Black White	L70 x W50 x H100mm	Cowl

ION 4 | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

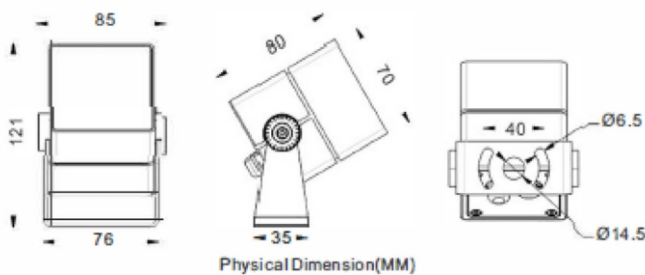

Technical Details

Power : 9W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow
Green | Blue | Red | RGB | Amber | RGBW

CRI : 90

Beam Angle : 5° | 10° | 12° | 20° | 30° | 40°
| 60° | 10°x22° | 20°x60°

Lumen Output : 630lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White

Reflector : Tempered Glass


Size : L80 x W70 x H121mm

IP Rating : IP66


Accessories : Cowl

Light Distribution


Polar light distribution diagram




Polar light distribution diagram



Polar light distribution diagram



Polar light distribution diagram



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Ion4-BL04	9W	630lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 10° 12° 30° 40° 60° 10°x22° 20°x60°	Black White	L80 x W70 x H121mm	Cowl

ION 9 | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

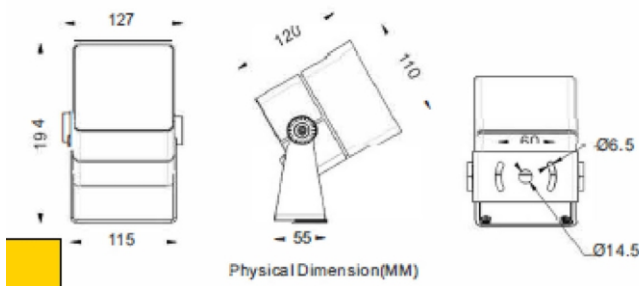

Technical Details

Power : 24W

CCT : 2700K | 3000K | 4000K | 6500K | Yellow
Green | Blue | Red | Amber | RGBW

CRI : 90

Beam Angle : 5° | 10° | 12° | 20° | 30° | 40°
| 60° | 10°x22° | 20°x60°

Lumen Output : 1680lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White


Reflector : Tempered Glass

Size : L120 x W110 x H194mm

IP Rating : IP66

Accessories : Cowl

Light Distribution

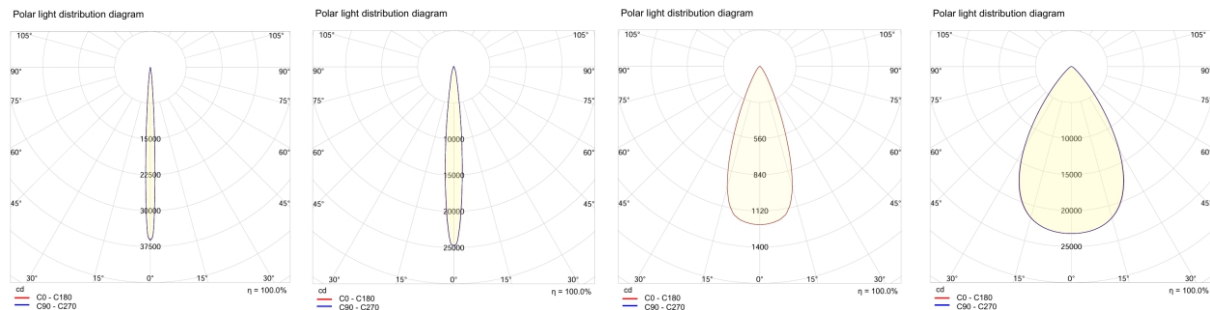

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Ion9-BL04	24W	1680lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 10° 12° 30° 40° 60° 10°x22° 20°x60°	Black White	L120 x W110 x H194mm	Cowl

ION 12 | Projector Lights



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

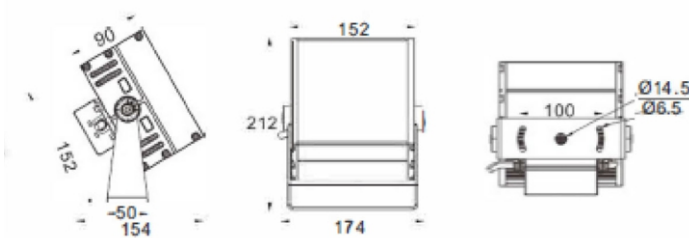


Physical Dimension(MM)

Technical Details

Power : 48W
CCT : 2700K 3000K 4000K 6500K Yellow Green Blue Red Amber RGBW
CRI : 90
Beam Angle : 5° 10° 12° 20° 30° 40° 60° 10°x22° 20°x60°
Lumen Output : 3360lm
Input Voltage : DC 24V
Driver : Triac 0-10V Dali DMX 512
Material : Aluminium
Finishing Color : Black White
Reflector : Tempered Glass
Size : L90xW152xH212mm
IP Rating : IP66
Accessories : Cowl

Light Distribution

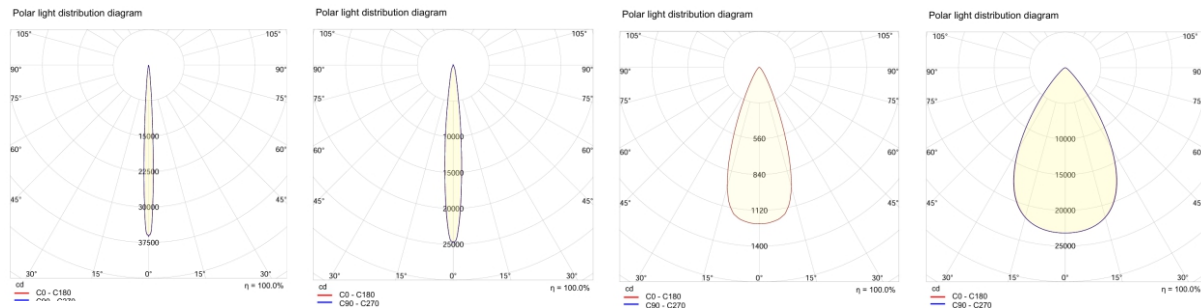

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Ion12-BL04	48W	3360lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 10° 12° 30° 40° 60° 10°x22° 20°x60°	Black White	L90xW152xH212mm	Cowl



The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

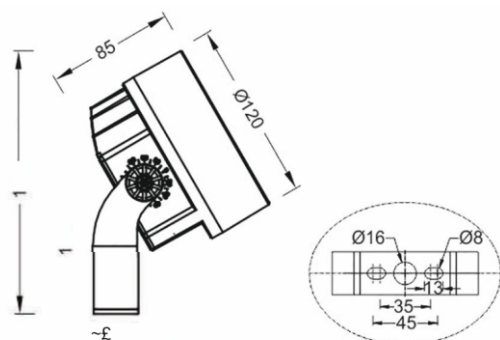

Technical Details

Power : 24W | 36W | 54W

CCT : 2700K | 3000K | 4000K | 6500K | RGBW

CRI : 90

Beam Angle : 3° | 5° | 8° | 10° | 12° | 20° | 24°
| 36° | 60° | 10°x30°

Lumen Output : 1680lm | 2520lm | 3780lm

Input Voltage : DC 24V

Driver : Triac | 0-10V | Dali | DMX 512

Material : Aluminium

Finishing Color : Black | White


Reflector : Tempered Glass

Size : Ø120 x H176mm | Ø150 x H209mm |
Ø180 x H245mm

IP Rating : IP66

Accessories : Cowl

Light Distribution

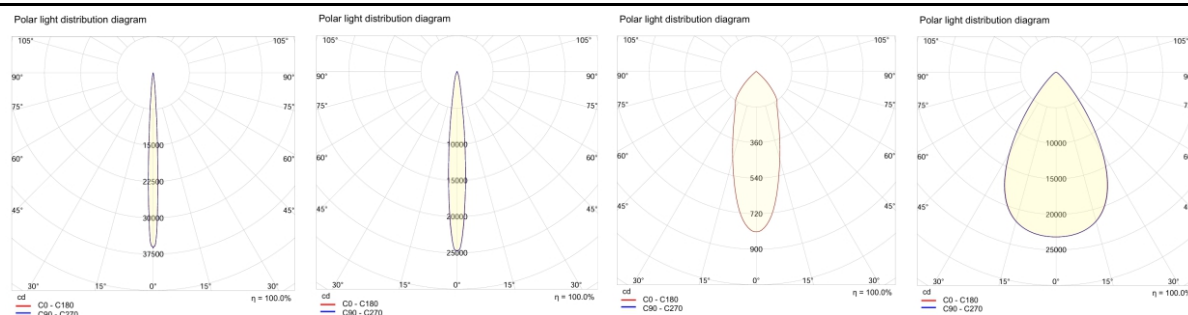

Light Performance




Order Options

<u>Model Code</u>	<u>Power</u>	<u>Lumens</u>	<u>CCT</u>	<u>CRI</u>	<u>Beam</u>	<u>Finish</u>	<u>Size</u>	<u>Accessories</u>
PL-Cyra-BL04	24W	1680lm	2700K	90	3°	Black	Ø120 x H176mm	Cowl
	36W	2520lm	3000K		5°	White	Ø150 x H209mm	
	54W	3780lm	4000K 6500K RGBW		8°		Ø180 x H245mm	
					10°			
					12°			
					20°			
					24°			
					30°			
					60°			
					10°x30°			

SOLANA | Projector Lights




The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

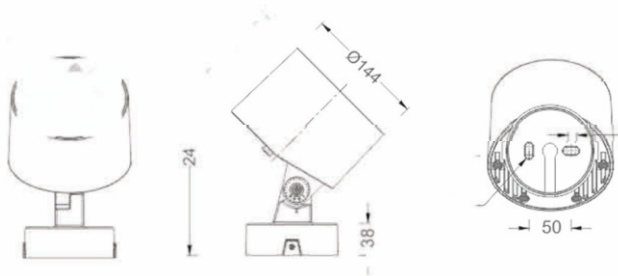

Technical Details

Power : 20W 42W 54W 72W 100W
CCT : 2700K 3000K 4000K 6500K RGBW
CRI : 90
Beam Angle : 3° 5° 8° 10° 12° 20° 24° 36° 60° 10°x30°
Lumen Output : 1400lm 2940lm 3780lm 5040lm 7000lm
Input Voltage : DC 24V
Driver : Triac 0-10V Dali DMX 512
Material : Aluminium
Finishing Color : Black White
Reflector : Tempered Glass
Size : Ø120 x H216mm Ø150 x H246mm Ø180 x H280mm Ø210x H326mm Ø240 x H353mm
IP Rating : IP66
Accessories : Filter Textured diffusion lenses Honeycomb louver Round meshed grill

Light Distribution

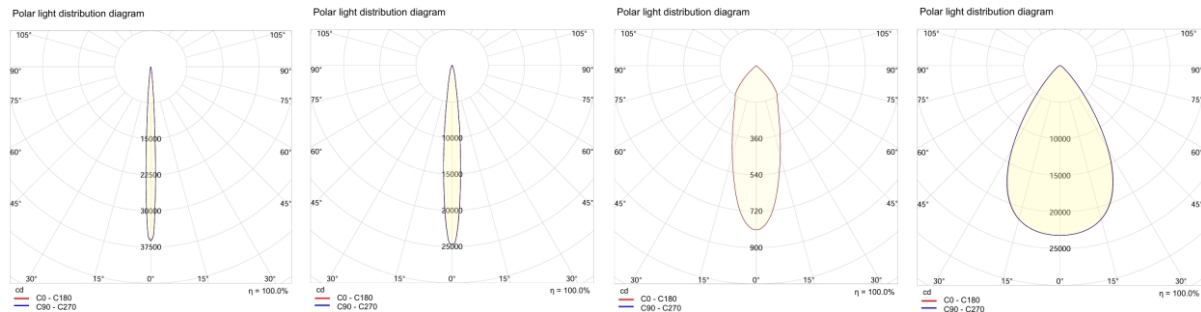



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Solana-BL04	20W 42W 54W 72W 100W	1400lm 2940lm 3780lm 5040lm 7000lm	2700K 3000K 4000K 6500K RGBW	90	3° 5° 8° 10° 12° 20° 24° 30° 60° 10°x30°	Black White	Ø120 x H216mm Ø150 x H246mm Ø180 x H280mm Ø210x H326mm Ø240 x H353mm	Filter Textured diffusion lenses Honeycomb louver Round meshed grill

SOL | Projector Lights

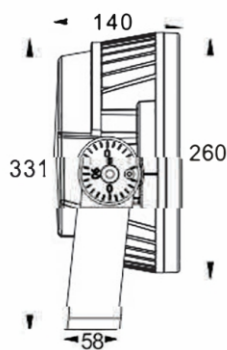


The outdoor projector light is a high-performance architectural fixture designed to deliver focused, powerful illumination for building facades, landscapes, signage, and architectural accents. It provides precise beam control to highlight specific features, enhance safety, and create striking visual effects in outdoor environments.

Technical Details

Power : 120W 150W 200W
CCT : 2700K 3000K 4000K 6500K Yellow Green Blue Red Amber RGBW
CRI : 90
Beam Angle : 5° 8° 10° 12° 20° 25° 30° 40° 45° 60° 10°x22° 15°x55° 20°x60°
Lumen Output : 12000lm 15000lm 20000lm
Input Voltage : AC 220-240V
Driver : Triac 0-10V Dali DMX 512
Material : Die cast aluminum
Finishing Color : Black
Reflector : Tempered Glass
Size : Ø300 x H381mm Ø370 x H446mm Ø425 x H498.5mm
IP Rating : IP66
Accessories : Cowl

Light Distribution

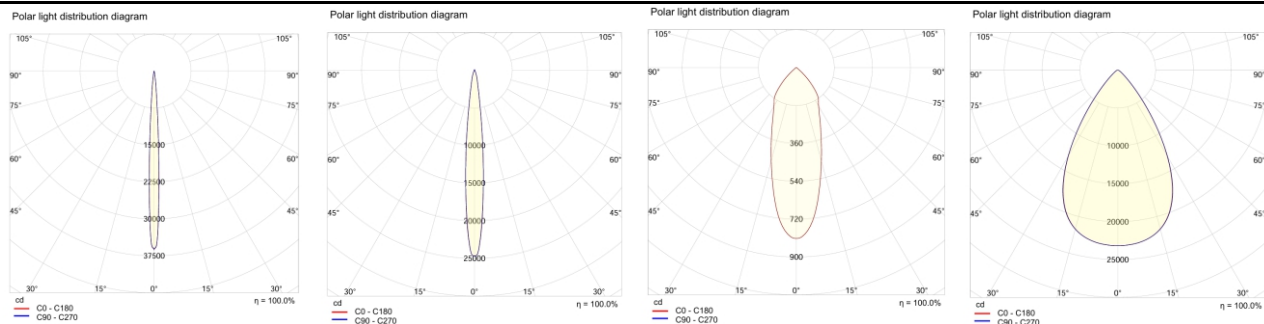

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
PL-Sol-BL04	120W 150W 200W	12000lm 15000lm 20000lm	2700K 3000K 4000K 6500K RED GREEN BLUE RGBW Amber	90	5° 8° 10° 12° 20° 25° 30° 40° 45° 60° 10°x22° 15°x55° 20°x60°	Black	Ø300 x H381mm Ø370 x H446mm Ø425 x H498.5mm	Cowl