


OBERON | Recessed Spotlight



LED downlight with traditional deep reflector. CCT changeable function is available. A perfect alternative to traditional recessed luminaries.



Technical Details

Power : 10W | 13W

CCT : 3000K | 4000K | 5000K

CRI : >80

Beam Angle : 80°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : Black | White


Reflector : White | Black | Silver

Size : Ø110 x 54mm

Cut out : Ø90-95mm

IP Rating : IP54

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Oberon-US01	10W 13W	80lm	3000K 4000K 5000K	80	80°	White Black	Ø110 x 54mm	Drop Glass  Halo Glass 

AVIOR | Recessed Spotlight



LED downlight with high lumen SMD LED and PC diffuser, which ensures uniform lighting and high light efficiency.



Size	Dimensions (mm)			
	A	B	C	D
3"	110	44	85	80
4"	145	48	120	104
5"	170	49	139	124
8"	228	48	195	179
10"	280	56	228	214

Technical Details

Power : 10W | 12W | 18W | 25W | 35W

CCT : 3000K | 4000K | 5000K

CRI : >80

Beam Angle : 100°

Lumen Output : 100-130lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : White

Reflector : White


Size : Ø110 x 44mm | Ø145 x 48mm |
Ø170 x 49mm | Ø228 x 48mm |
Ø280 x 56mm

Cut out : Ø90-95mm | Ø120-130mm |
Ø140-150mm | Ø200-210mm |
Ø230-260mm

IP Rating : IP54

Light Distribution

Polar light distribution diagram

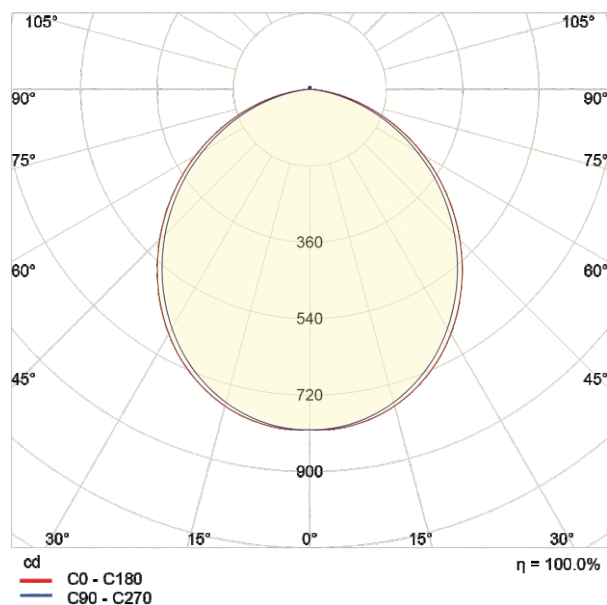

Light Performance


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Avior-US01	10W 12W 18W 25W 35W	100-130lm	3000K 4000K 5000K	80	80°	White	Ø110 x 44mm Ø145 x 48mm Ø170 x 49mm Ø228 x 48mm Ø280 x 56mm	

NASH | Recessed Spotlight



LED down light with super slim design. High lumen SMD LED and PC diffuser provide uniform light. Aluminum profile provides excellent thermal dissipation.

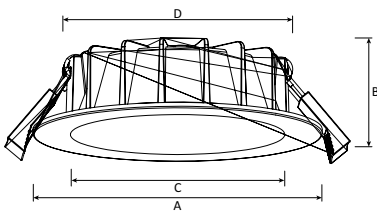

Size	Dimensions (mm)			
	A	B	C	D
3"	110	30	81.5	87
4"	145	30	106	115
6"	190	30	143	152
8"	225	34	173	185

Technical Details

Power : 10W | 13W | 18W | 25W | 35W | 42W

CCT : 3000K | 4000K | 5000K

CRI : >80

Beam Angle : 100°

Lumen Output : 80lm/w

Input Voltage : AC 220-240V

Driver : Triac

Material : Die Cast Aluminium

Finishing Color : White

Reflector : White


Size : Ø110 x 30mm | Ø145 x 30mm |
Ø190 x 30mm | Ø225 x 34mm |

Cut out : Ø90-95mm | Ø120-130mm |
Ø160-170mm | Ø200-210mm

IP Rating : IP54

Light Distribution

Polar light distribution diagram

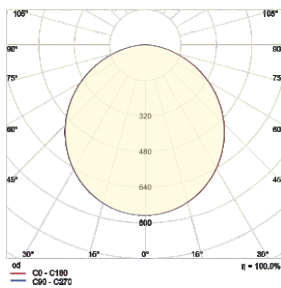

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Nash-US01	10W 13W 18W 25W 35W 42W	80lm	3000K 4000K 5000K	80	100°	White	Ø110 x 30mm Ø145 x 30mm Ø190 x 30mm Ø225 x 34mm	

NASH-SQ | Recessed Spotlight



LED Down light adopts high lumen SMD LED, PMMA diffuser with even light output.

Technical Details

Power : 25W

CCT : 3000K | 4000K | 5000K

CRI : >80

Beam Angle : 100°

Lumen Output : 80lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium


Finishing Color : White

Reflector : White

Size : L190 x W190 x H54mm


Cut out : L165 x W165mm

IP Rating : IP20 | IP44

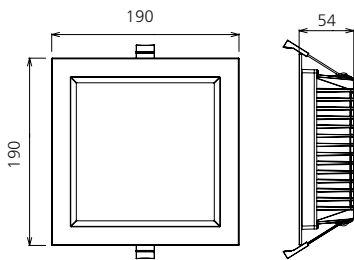


Light Distribution

Polar Diagram Comparison

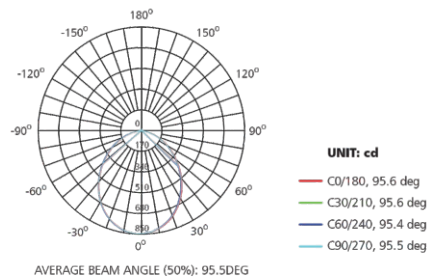

Light Performance

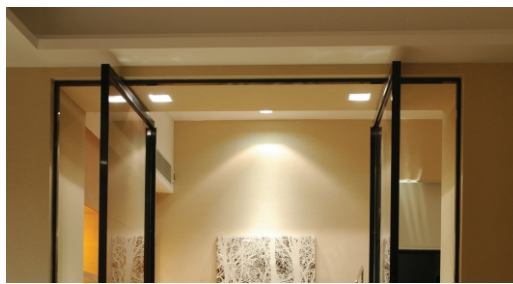


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-NashSQ-US01	25W	80lm	3000K 4000K 5000K	80	100°	White	L190 x W190 x H54mm	

LYNX | Recessed Spotlight



Deep anti-glare spotlights, 4 sizes, soft & even light, bright contrast between light and dark.



Technical Details

Power : 15W | 20W | 30W

CCT : 2700K | 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 15° | 24° | 38° | 60°

Lumen Output : 110lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : White | Black




Reflector : White | Black | Silver

Size : Ø83 x H52mm | Ø110 x H65mm | Ø160mm x H93mm


Cut out : Ø75mm | Ø95mm | Ø145mm

IP Rating : IP45

Light Distribution

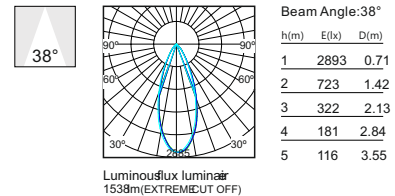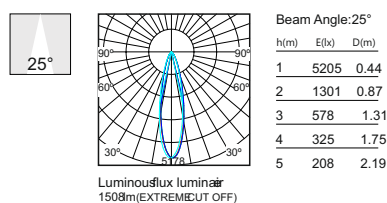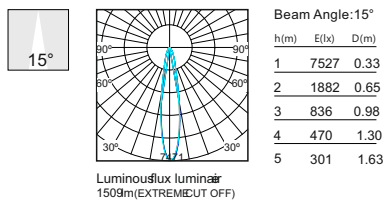

Light Performance

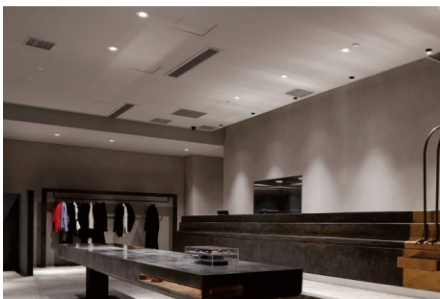


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Lynx-SD03	15W 20W 30W	110lm	2700K 3000K 4000K 5000K	90	15° 24° 38° 60°	White Black	Ø83 x H52mm Ø110 x H65mm Ø160mm x H93mm	

ORION | Recessed Spotlight



Recessed COB trimless down lights with high lumen efficiency. Deep anti-glare with lens optics.

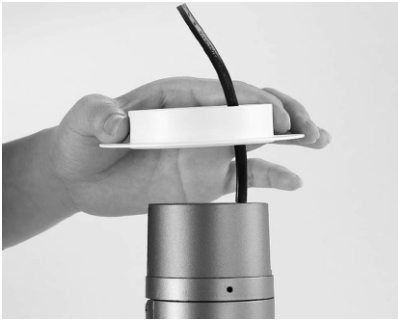

Technical Details

Power : 15W

CCT : 2700K | 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 24° | 36° | 60°

Lumen Output : 110lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : White | Black

Reflector : White | Black | Silver


Size : Ø100 x H95mm

Cut out : Ø75mm


IP Rating : IP40

Light Distribution

Polar light distribution diagram




Light Performance

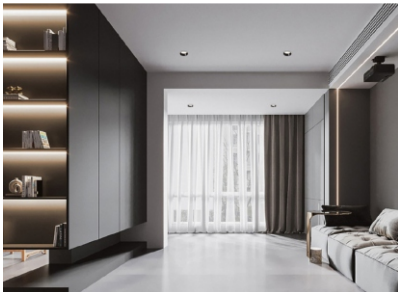

Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Lynx-SD03	15W	110lm	2700K 3000K 4000K 5000K	90	24° 36° 60°	White Black	Ø100 x H95mm	

KEPLER | Recessed Spotlight



Deep reflector design with anti-glare effect. Die-casting housing provides excellent heat dissipation performance.

Technical Details

Power : 18W | 22W | 25W | 32W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 60°

Lumen Output : 90lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium



Finishing Color : White | Black

Reflector : Silver


Size : L190 x W190 x H102 mm

Cut out : L170 x W170mm

IP Rating : IP40

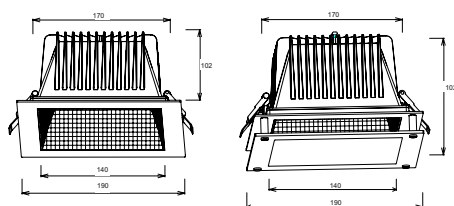

Light Distribution



Light Performance



Order Options


Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Kepler-US01	18W 22W 25W 32W	90lm	3000K 4000K 5000K	90	60°	White Black	Ø100 x H95mm	Full Frosted Drop Glass Halo Drop Glass



BELLATRIX | Recessed Spotlight



Linear recessed downlight with excellent thermal management. Modular lens and multi-louver reflectors design realize anti-glare UGR<19 effect.

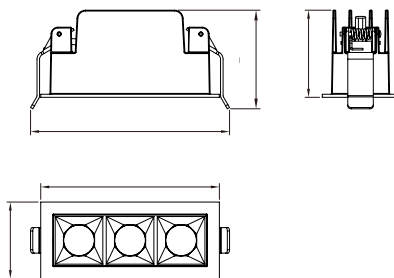

Technical Details

Power : 4W | 6W | 9W | 13W | 25W | 37W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 15° | 36°

Lumen Output : 80lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V | DALI

Material : Die Cast Aluminium

Finishing Color : White | Black


Reflector : Black

Size : L45 × W45 × H42mm | L76 × W45 × H51mm
L105 × W45 × H51mm | L147 × W45 × H51mm |
L280 × W45 × H51mm | L413 × W45 × H51mm


Cut out : L37 × W37mm | L68 × W37mm |
L97 × W37mm | L139 × W37mm |
L272 × W37mm | L405 × W37mm

IP Rating : IP20

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Bellatrix-US01	18W 22W 25W 32W	90lm	3000K 4000K 5000K	90	60°	White Black	Ø100 x H95mm	

EOS | Recessed Spotlight



LED recessed deep anti glare downlight. Die-casting housing provides excellent heat dissipation performance.



Technical Details

Power : 5W | 10W | 20W | 30W | 40W

CCT : 3000K | 4000K | 5000K

CRI : >90

Beam Angle : 15° | 24° | 38°

Lumen Output : 70-100lm/w

Input Voltage : AC 220-240V

Driver : Triac | 1-10V

Material : Die Cast Aluminium

Finishing Color : White | Black




Reflector : White | Black | Silver

Size : Ø70 x H56mm | Ø90 x H72mm | Ø110 x H92mm


Cut out : Ø60mm | Ø75mm | Ø110mm | Ø120mm | Ø140mm

IP Rating : IP20

Light Distribution

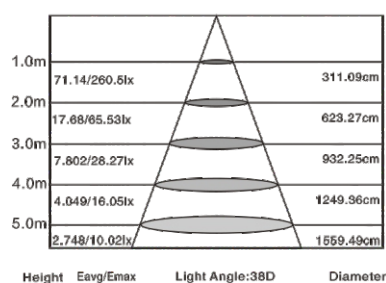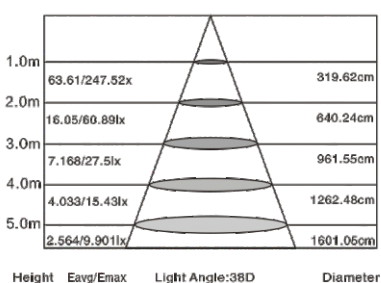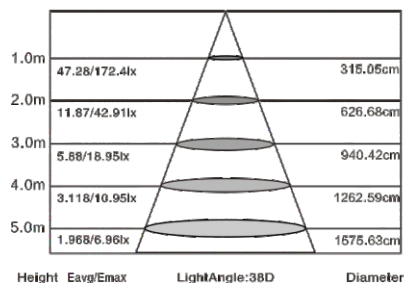


Light Performance

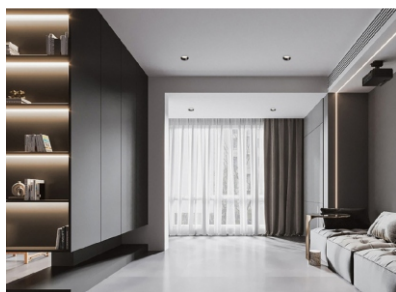


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Eos-LS02	5W 10W 20W 30W 40W	70-100lm	3000K 4000K 5000K	90	15° 24° 38°	White Black	Ø70 x H56mm Ø90 x H72mm Ø110 x H92mm	

KORONIS | Recessed Spotlight






Our anti-glare recessed square spotlight with minimum trim and tilt 30° for adjusting lighting angle.



Technical Details

Power : 7W 12W
CCT : 2700K 3000K 4000K 5000K
CRI : >90
Beam Angle : 24° 36° 55°
Lumen Output : 85lm/w
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Die Cast Aluminium
Finishing Color : White Black
Reflector : White Black Silver
Size : L85 x W85 x H105mm L85 x W85 x H111mm
Cut out : L75 x W75mm
IP Rating : IP54 IP40

Light Distribution

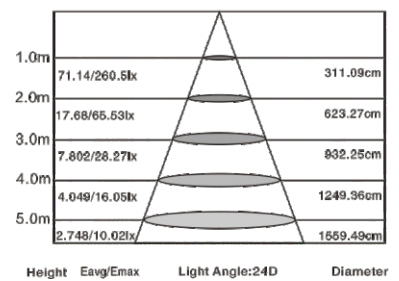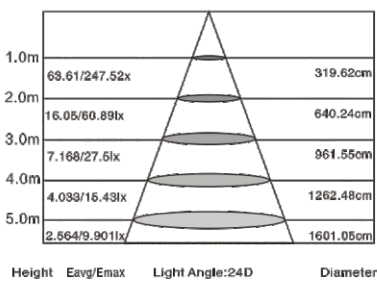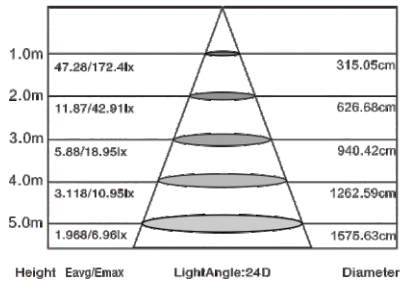

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
DL-Koronis-LS02	7W 12W	85lm	2700K 3000K 4000K 5000K	90	24° 36° 55°	White Black	L85 x W85 x H105mm L85 x W85 x H111mm	