


PLUTO | Recessed Spotlight



Minimalistic design with cutout of 35mm.
Deep recessed LED.
Soft curved design.
With complete glare control and visual comfort.



Technical Details

Power : 1.5W

CCT : 3000K | 4000K

CRI : >90

Beam Angle : 18° | 30°

Lumen Output : 110lm/W

Input Voltage : 24V DC

Driver : Triac | 1-10V | DALI

Material : Aluminium

Finishing Color : Black | White


Reflector : White | Black

Size : Ø40.5 x H52mm


Cut out : 35mm

IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Pluto-EL08	1.5W	110lm	3000K 4000K	90	18° 30°	White Black	Ø40.5 x H52mm	

NEEDLE | Recessed Spotlight




Minimalistic trimless design with cutout of 35mm.
Deep recessed LED Trimless spotlight.
With complete glare control and visual comfort.



Technical Details

Power : 5W
CCT : 3000K 4000K
CRI : >90
Beam Angle : 12° 30° 36° 60°
Lumen Output : 350lm/W
Input Voltage : 24V DC
Driver : Triac 1-10V DALI
Material : Aluminium
Finishing Color : Black White
Reflector : White Black
Size : Ø56 x H86mm
Cut out : 35mm
IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Needle-SD03	5W	350lm	3000K 4000K	90	15° 24° 36° 60°	White Black	Ø56*H86mm	

DRACO | Recessed Spotlight




Super slim downlight with 40mm thickness. High lumen efficiency. Interchangeable CCT (3000K+4000K) with slide switch.

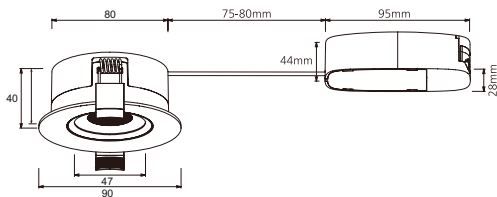

Technical Details

Power : 7W
CCT : 3000K 4000K
CRI : >90
Beam Angle : 60°
Lumen Output : 120lm/W
Input Voltage : AC 220-240V
Driver : Triac
Material : Aluminium
Finishing Color : Black White
Reflector : Polycarbonate
Size : Ø90 x H40mm
Cut out : Ø83-85mm
IP Rating : IP54 IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Draco-US01	7W	120lm	3000K 4000K	90	60°	White Black	Ø90 x H40mm	

SCORPIUS | Recessed Spotlight




Extension design downlight.
High lumen efficiency.
Pull Out Design, 350 degree
horizontal rotation and 20 degree
vertically rotation to meet more
application.

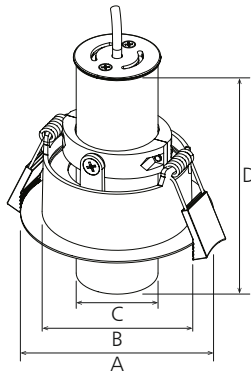

Technical Details

Power : 6W 10W 12W
CCT : 2700K 3000K 4000K
CRI : >90
Beam Angle : 24° 36°
Lumen Output : 100lm/W
Input Voltage : AC 220-240V
Driver : Triac
Material : Die Cast Aluminium
Finishing Color : Black White
Reflector : PMMA
Size : Ø85 x H111.5mm Ø100 x H131.5mm Ø100 x H131.5mm
Cut out : Ø68-80mm Ø82-95mm Ø82-95mm
IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Scorpius-US01	6W 10W 12W	100lm	2700K 3000K 4000K	90	12° 36°	White Black	Ø85 x H111.5mm Ø100 x H131.5mm Ø100 x H131.5mm	

CALLISTO-OV | Recessed Spotlight




Recessed LED Spotlight with oval pinhole opening. Housing and Mounting ring made of die-casting aluminum. Light tilts to a maximum of 0°-30° onto the vertical plane.



Technical Details

Power : 7W 10W 12W
CCT : 2700K 3000K 4000K 6000K
CRI : >90
Beam Angle : 15° 24° 38°
Lumen Output : 90lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Die Cast Aluminium
Finishing Color : Black White
Reflector :
Size : Ø85 x H92mm
Cut out : Ø75mm
IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-CallistoOV-SD03	7W 10W 12W	90lm	2700K 3000K 4000K 6000K	90	15° 24° 38°	White Black	Ø85 x H92mm	

CALLISTO-SQ | Recessed Spotlight




Recessed LED Spotlight with square pinhole opening. Housing and Mounting ring made of die-casting aluminum. Light tilts to a maximum of 0°-30° onto the vertical plane.




Technical Details

Power : 7W 10W 12W
CCT : 2700K 3000K 4000K 6000K
CRI : >90
Beam Angle : 15° 24° 38°
Lumen Output : 90lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Die Cast Aluminium
Finishing Color : Black White
Reflector :
Size : Ø85 x H92mm
Cut out : Ø75mm
IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-CallistoSQ-SD03	7W 10W 12W	90lm	2700K 3000K 4000K 6000K	90	15° 24° 38°	White Black	Ø85 x H92mm	

CALLISTO-RD | Recessed Spotlight




Recessed LED Spotlight with pinhole opening. Housing and Mounting ring made of die-casting aluminum. Light tilts to a maximum of 0°-30° onto the vertical plane.




Technical Details

Power : 7W 10W 12W
CCT : 2700K 3000K 4000K 6000K
CRI : >90
Beam Angle : 15° 24° 38°
Lumen Output : 90lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Die Cast Aluminium
Finishing Color : Black White
Reflector :
Size : Ø85 x H92mm
Cut out : Ø75mm
IP Rating : IP20

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-CallistoRD-SD03	7W 10W 12W	90lm	2700K 3000K 4000K 6000K	90	15° 24° 38°	White Black	Ø85 x H92mm	

GEMINI | Recessed Spotlight



Deep antiglare design to create a good lighting environment. Precise angle, perfect light control. Good heat dissipation. Snap in mounting design, simple and convenient.

Technical Details

Power : 5W | 7W

CCT : 3000K | 4000K

CRI : >90

Beam Angle : 15° | 24° | 38°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver :

Material : Die Cast Aluminium


Finishing Color : Black | White

Reflector : White | Black




Size : Ø68 x H60mm | Ø80 x H60mm

Cut out : Ø60mm | Ø75mm


IP Rating : IP20

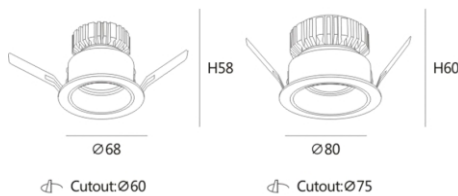

Light Distribution

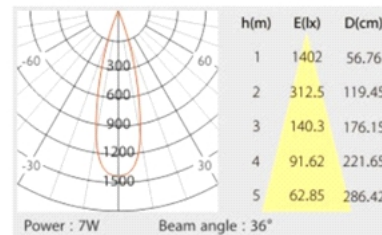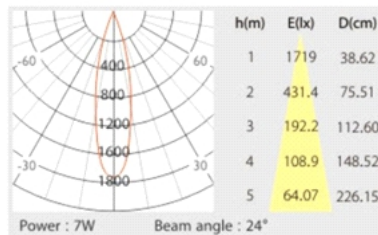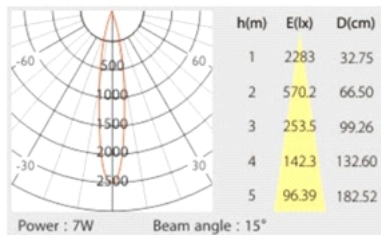

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Gemini-GL09	5W 7W	80lm	3000K 4000K	90	15° 24° 38°	White Black	Ø68 x H60mm Ø80 x H60mm	

VIRGO | Recessed Spotlight



Deep antiglare design to create a good lighting environment. Precise angle, perfect light control. Good heat dissipation. Snap in mounting design, simple and convenient.

Technical Details

Power : 5W | 7W | 10W

CCT : 3000K | 4000K

CRI : >90

Beam Angle : 15° | 24° | 38°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver :

Material : Die Cast Aluminium


Finishing Color : Black | White

Reflector : White | Black | Silver


Size : Ø70 x H80mm | Ø85 x H85mm
Ø95 x H97mm

Cut out : Ø60mm | Ø75mm | Ø85mm


IP Rating : IP20

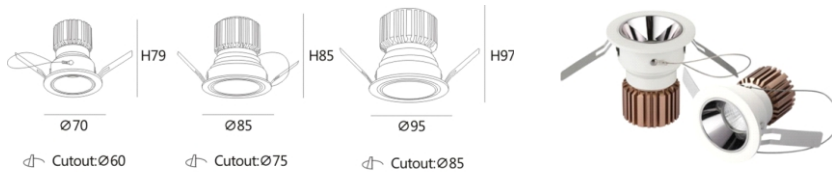

Light Distribution

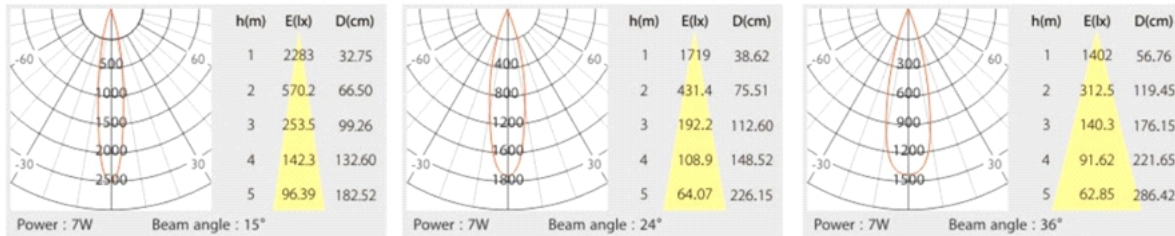

Light Performance

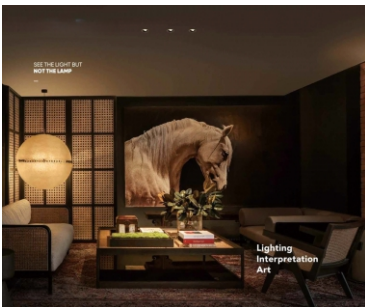

Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Virgo-GL09	5W 7W 10W	80lm	3000K 4000K	90	15° 24° 38°	White Black	Ø70 x H80mm Ø85 x H85mm Ø95 x H97mm	

VEGA | Recessed Spotlight



Deep antiglare design to create a good lighting environment. Precise angle, perfect light control. Good heat dissipation. Snap in mounting design, simple and convenient.

Technical Details

Power : 12W

CCT : 3000K | 4000K

CRI : >90

Beam Angle : 20°

Lumen Output : 80lm/W

Input Voltage : AC 220-240V

Driver :

Material : Die Cast Aluminium


Finishing Color : Black | White

Reflector : White | Black


Size : Ø85 x H88mm

Cut out : Ø80mm

IP Rating : IP20

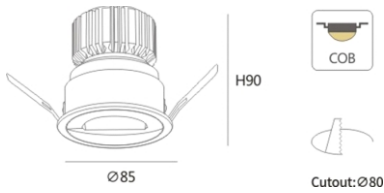

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Vega-GL09	12W	80lm	3000K 4000K	90	20°	White Black	Ø85 x H88mm	

CASTOR | Recessed Spotlight




COB downlight with optical lens design. Light tilts to a maximum of 0°-30° onto the vertical plane.



Technical Details

Power : 6W 10W
CCT : 2700K 3000K 4000K
CRI : >90
Beam Angle : 24° 36° 60°
Lumen Output : 110lm/W
Input Voltage : AC 220-240V
Driver : Triac 1-10V DALI
Material : Die Cast Aluminium
Finishing Color : Black White
Reflector : White Black
Size : Ø90 x H77mm
Cut out : Ø83mm
IP Rating : IP20

Light Distribution



Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Castor-VZ10	6W 10W	110lm	2700K 3000K 4000K	90	24° 36° 60°	White Black	Ø90 x H77mm	

ANTARES | Recessed Spotlight




COB LED with a high efficiency reflector of optical. Body made of Cast aluminum with anti-rust powder coating process. Driver with waterproof box.



Technical Details

Power : 6W 10W
CCT : 2700K 3000K 4000K
CRI : >90
Beam Angle : 24° 36° 60°
Lumen Output : 100lm/W
Input Voltage : AC 220-240V
Driver : ON-OFF
Material : Die Cast Aluminium
Finishing Color : Black White
Reflector : White Black
Size : Ø87 x H44mm
Cut out : Ø80mm
IP Rating : IP65

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
SL-Antares-VZ10	6W 10W	100lm	2700K 3000K 4000K	90	24° 36° 60°	White Black	Ø87 x H44mm	