



# EQUINOX | Underwater Lights

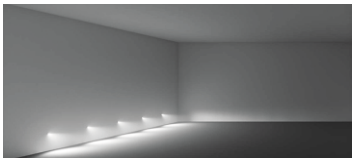


Underwater LED lights are high-performance, energy-efficient luminaires designed specifically for submerged applications such as swimming pools, fountains, ponds, water features, and decorative installations. Equipped with high-intensity LEDs, they deliver vibrant, uniform illumination with excellent color rendering and a variety of color options, including single color (white, warm white, cool white) and RGB for dynamic color-changing effects.



## Technical Details

Power : 1W   9W   18W
CCT : 3000K   4000K   6000K   Red   Green   Blue   Amber
CRI : 90
Beam Angle : 10°   25°   40°
Lumen Output : 85lm   675lm   1350lm
Input Voltage : DC 24V
Driver : -
Material : 316L Stainless steel
Finishing Color : 316L Stainless steel
Reflector : Tempered Glass
Size : Ø105 x H71mm   Ø115 x H65mm   Ø180 x H75mm
Cut out : Ø70mm   Ø78mm   Ø138mm
IP Rating : IP68
Accessories : Recessing tube

## Light Distribution

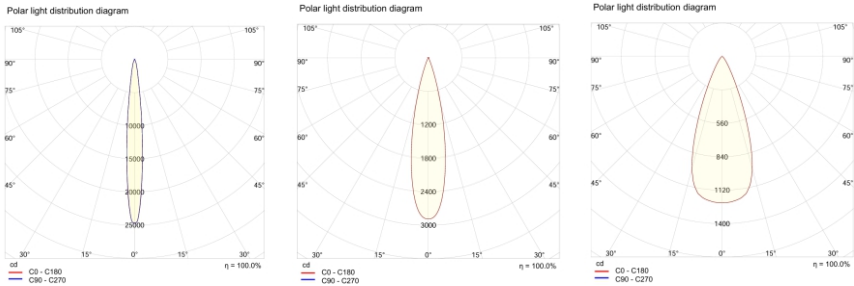

## Light Performance




## Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
UL-Equinox-EM07	1W 9W 18W	85lm 675lm 1350lm	3000K 4000K 6000K RED GREEN BLUE AMBER	90	10° 25° 40°	316L Stainless steel	Ø105 x H71mm Ø115 x H65mm Ø180 x H75mm	Recessing tube

## RING | Underwater Lights




Underwater LED lights are high-performance, energy-efficient luminaires designed specifically for submerged applications such as swimming pools, fountains, ponds, water features, and decorative installations. Equipped with high-intensity LEDs, they deliver vibrant, uniform illumination with excellent color rendering and a variety of color options, including single color (white, warm white, cool white) and RGB for dynamic color-changing effects.



### Technical Details

Power : 3W   9W   18W   25W
CCT : 3000K   4000K   6000K   Red   Green   Blue
CRI : 90
Beam Angle : 15°   30°   45°   60°
Lumen Output : 255lm   765lm   1530lm   2125lm
Input Voltage : DC 24V
Driver : 1-10V   DALI   DMX
Material : Hard Chrome plated Molding Stainless steel
Finishing Color : Stainless steel
Reflector : Tempered Glass
Size : Ø100 x 61mm   Ø150 x 83mm   Ø180 x 109mm
Cut out : -
IP Rating : IP68
Accessories :

### Light Distribution

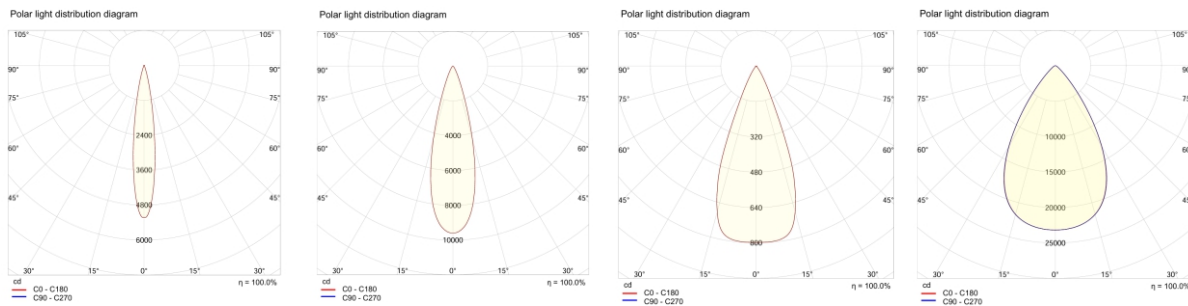

### Light Performance




### Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
UL-Ring-BL04	3W 9W 18W 25W	255lm 765lm 1530lm 2125lm	3000K 4000K 6000K RGB	90	15° 30° 45° 60°	Stainless steel	Ø100 x 61mm Ø150 x 83mm Ø180 x 109mm	

## ELECTRON | Underwater Lights



Underwater LED lights are high-performance, energy-efficient luminaires designed specifically for submerged applications such as swimming pools, fountains, ponds, water features, and decorative installations. Equipped with high-intensity LEDs, they deliver vibrant, uniform illumination with excellent color rendering and a variety of color options, including single color (white, warm white, cool white) and RGB for dynamic color-changing effects.

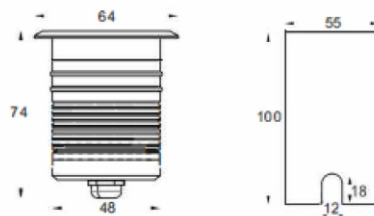

### Technical Details

Power : 3W | 5W

CCT : 2700K | 3000K | 4000K | 6500K | Red | Green | Blue | Yellow | Amber | RGB 4in 1

CRI : 90

Beam Angle : 15° | 24° | 38°

Lumen Output : 255lm | 425lm

Input Voltage : DC 24V

Driver : 1-10V | DALI | DMX

Material : Stainless steel

Finishing Color : Stainless steel

Reflector : Tempered Glass


Size : Ø64 x H74mm | Ø80 x H85mm

Cut out : Ø54mm | Ø69mm


IP Rating : IP68

Accessories : Mounting sleeve

### Light Distribution

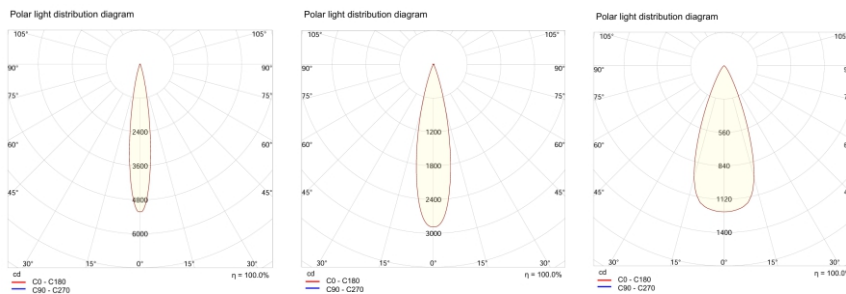

### Light Performance

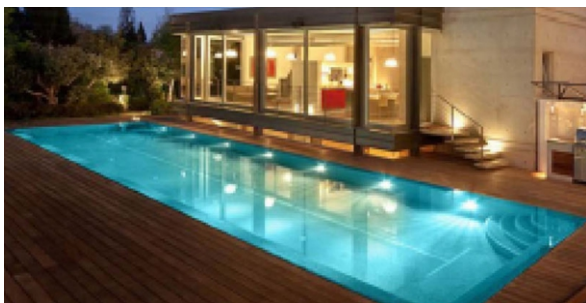

### Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
UL-Electron-BL04	3W 5W	255lm 425lm	2700K 3000K 4000K 6500K RED GREEN BLUE YELLOW AMBER RGB 4 in 1	90	15° 24° 38°	Stainless steel	Ø64 x H74mm Ø80 x H85mm	Mounting sleeve



# TRITON | Underwater Lights




Underwater LED lights are high-performance, energy-efficient luminaires designed specifically for submerged applications such as swimming pools, fountains, ponds, water features, and decorative installations. Equipped with high-intensity LEDs, they deliver vibrant, uniform illumination with excellent color rendering and a variety of color options, including single color (white, warm white, cool white) and RGB for dynamic color-changing effects.

## Technical Details


Power : 12W   27W
CCT : 3300K   4500K   6000K   Red   Green   Blue   Amber   RGB
CRI : 80
Beam Angle : 25°   40°
Lumen Output : 840lm   1350lm
Input Voltage : DC 24V
Driver : 1-10V   DALI   DMX
Material : Stainless steel
Finishing Color : Stainless steel
Reflector : Glass
Size : L420 x W115 x H80mm
Cut out : L385 x W80mm
IP Rating : IP68
Accessories : Recessing Box

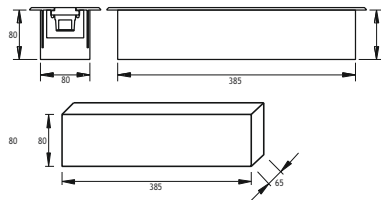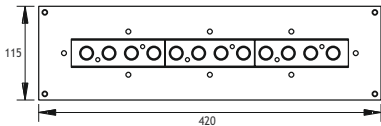

## Light Distribution

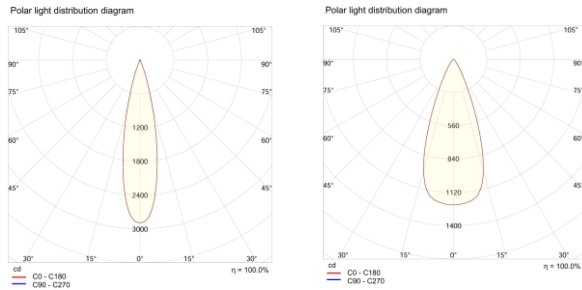

## Light Performance



## Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
UL-Triton-BL04	12W 27W	840lm 1350lm	3300K 4500K 6000K RED GREEN BLUE AMBER RGB	90	25° 40°	Stainless steel	L385 x W80mm	Recessing box