


GAMMA 1 | WallLights Recessed




The recessed wall light is a robust and stylish outdoor lighting solution designed for modern architectural facades and pathways. Engineered to be embedded seamlessly into exterior walls, steps, or boundary structures, it provides glare-free, directional illumination that enhances safety and adds visual appeal.

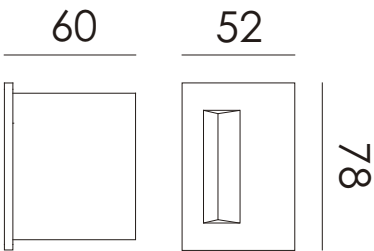

Technical Details

Power : 2W
CCT : 2700K 3000K 4000K 6500K
CRI : 90
Beam Angle : Asymmetric
Lumen Output : 80lm
Input Voltage : AC 220-240V
Cutout : L74 × W46mm
Material : Aluminum
Finishing Color : Black Grey
Size : L78 × W52 × H60mm
IP Rating : IP65

Light Distribution

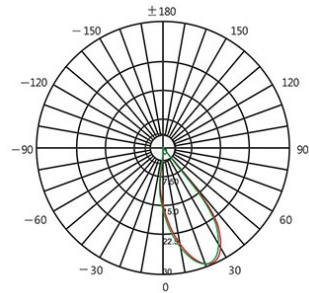


Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WR-Gamma1-AM03	2W	80lm	2700K 3000K 4000K 6500K	90	Asymmetric	Black Grey	L78 × W52 × H60mm	

GAMMA 2 | WallLights Recessed

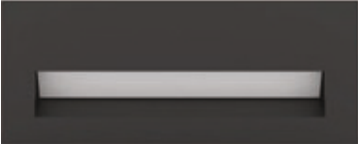


The recessed wall light is a robust and stylish outdoor lighting solution designed for modern architectural facades and pathways. Engineered to be embedded seamlessly into exterior walls, steps, or boundary structures, it provides glare-free, directional illumination that enhances safety and adds visual appeal.

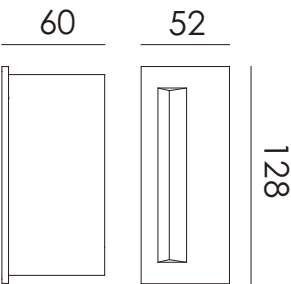

Technical Details

Power : 4W
CCT : 2700K 3000K 4000K 6500K
CRI : 90
Beam Angle : Asymmetric
Lumen Output : 160lm
Input Voltage : AC 220-240V
Cutout : L124 × W46mm
Material : Aluminum
Finishing Color : Black Grey
Size : L128 × W52 × H60mm
IP Rating : IP65

Light Distribution

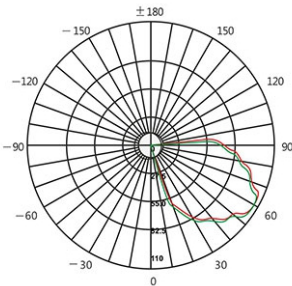

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WR-Gamma2-AM03	4W	160lm	2700K 3000K 4000K 6500K	90	Asymmetric	Black Grey	L128 × W52 × H60mm	

GAMMA 3 | WallLights Recessed




The recessed wall light is a robust and stylish outdoor lighting solution designed for modern architectural facades and pathways. Engineered to be embedded seamlessly into exterior walls, steps, or boundary structures, it provides glare-free, directional illumination that enhances safety and adds visual appeal.

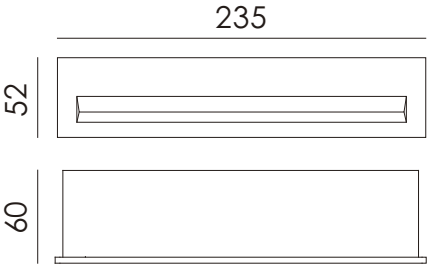

Technical Details

Power : 8W
CCT : 2700K 3000K 4000K 6500K
CRI : 90
Beam Angle : Asymmetric
Lumen Output : 320lm
Input Voltage : AC 220-240V
Cutout : L231 × W46mm
Material : Aluminum
Finishing Color : Black Grey
Size : L235 × W52 × H60mm
IP Rating : IP65

Light Distribution

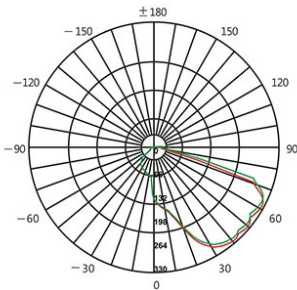

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WR-Gamma3-AM03	8W	320lm	2700K 3000K 4000K 6500K	90	Asymmetric	Black Grey	L235 × W52 × H60mm	

MAGELLAN | WallLights Recessed



The recessed wall light is a robust and stylish outdoor lighting solution designed for modern architectural facades and pathways. Engineered to be embedded seamlessly into exterior walls, steps, or boundary structures, it provides glare-free, directional illumination that enhances safety and adds visual appeal.

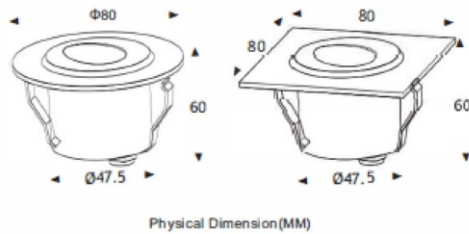

Technical Details

Power : 1x2W

CCT : 2700K | 3000K | 4000K | 6500K | Red | Green | Blue

CRI : 90

Beam Angle : 80°

Lumen Output : 80lm

Input Voltage : AC 240V

Driver : Triac | 0-10V | Dali

Cutout : 71mm

Material : Die cast aluminum


Finishing Color : Black | Grey

Size : Ø80x H60mm

IP Rating : IP65

Accessories : Mounting sleeve

Light Distribution

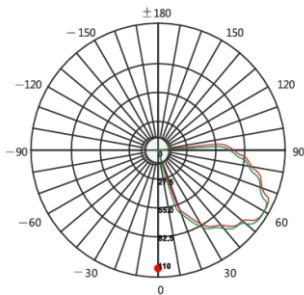

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WR-Magellan-BL04	1x2W	80lm	2700K 3000K 4000K 6500K Red Blue Green	90	80°	Black Grey	Ø80x H60mm	Mounting sleeve

CENTAUR | WallLights Recessed



The recessed wall light is a robust and stylish outdoor lighting solution designed for modern architectural facades and pathways. Engineered to be embedded seamlessly into exterior walls, steps, or boundary structures, it provides glare-free, directional illumination that enhances safety and adds visual appeal.

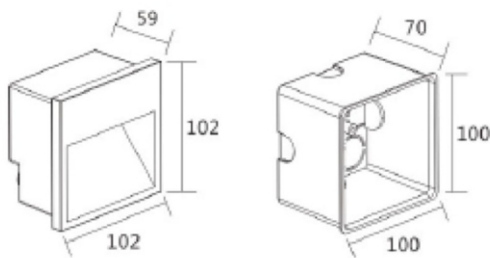

Technical Details

Power : 3W

CCT : 2700K | 3000K | 4000K | 6500K

CRI : 90

Beam Angle : 120°

Lumen Output : 180lm

Input Voltage : AC 240V

Driver : Triac | 0-10V | Dali

Cutout : L100 x W100 x H70mm

Material : Die cast aluminum


Finishing Color : Black | Grey

Size : L102xW102xH59mm


IP Rating : IP65

Accessories : Recessing box

Light Distribution

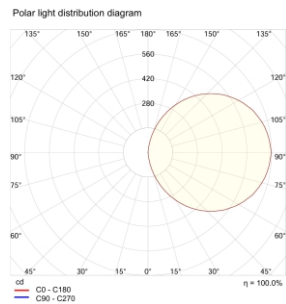


Light Performance

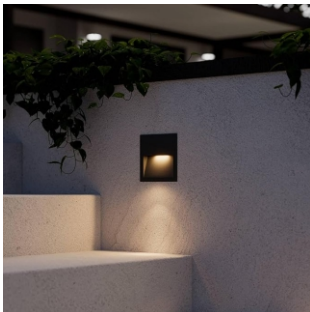


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WR-Centaur-BL04	3W	180lm	2700K 3000K 4000K 6500K	90	120°	Black Grey	L102xW102xH59mm	Recessing box

TROJANS | WallLights Recessed




The recessed wall light is a robust and stylish outdoor lighting solution designed for modern architectural facades and pathways. Engineered to be embedded seamlessly into exterior walls, steps, or boundary structures, it provides glare-free, directional illumination that enhances safety and adds visual appeal.

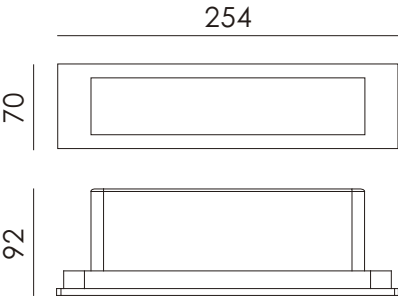

Technical Details

Power : 7W
CCT : 2700K 3000K 4000K 6500K
CRI : 90
Beam Angle : 120°
Lumen Output : 280lm
Input Voltage : AC 220-240V
Cutout : L252 × W69mm
Material : Die cast aluminum
Finishing Color : Black Grey
Size : L254 × W70 × H92mm
IP Rating : IP65

Light Distribution

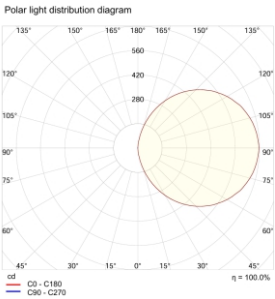

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WR-Trojans-AM03	7W	280lm	2700K 3000K 4000K 6500K	90	120°	Black Grey	L254 × W70 × H92mm	

GALACTIC | WallLights Recessed



The recessed wall light is a robust and stylish outdoor lighting solution designed for modern architectural facades and pathways. Engineered to be embedded seamlessly into exterior walls, steps, or boundary structures, it provides glare-free, directional illumination that enhances safety and adds visual appeal.

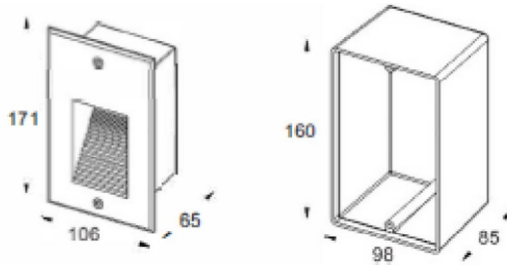

Technical Details

Power : 15W

CCT : 2700K | 3000K | 4000K | 6500K | Red | Green | Blue

CRI : 90

Beam Angle : 80°

Lumen Output : 70lm

Input Voltage : AC 240V

Driver : Triac | 0-10V | Dali

Cutout : L160×W98×H85mm

Material : Die cast aluminum

Finishing Color : Black | Grey


Size : L171×W106×H65mm

IP Rating : IP65


Accessories : Mounting sleeve

Light Distribution

Polar light distribution diagram

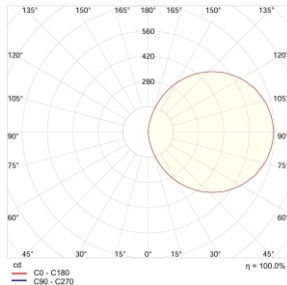

Light Performance

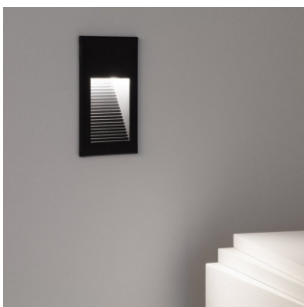

Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WR-Galactic-BL04	15W	70lm	2700K 3000K 4000K 6500K Red Blue Green	90	80°	Black Grey	L171×W106×H65mm	Mounting sleeve