

ZENITH ROUND | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.

Technical Details

Power : 2x6W | 2x10W | 2x12W | 2x15W

CCT : 2700K | 3000K | 4000K | 6500K

CRI : 90

Beam Angle : 15° | 24° | 36° | 60°

Lumen Output : 2x600lm | 2x1000lm | 2x1200lm | 2x1500lm

Input Voltage : AC 220-240V

Driver : 1-10V | DALI | DMX


Material : Aluminum

Finishing Color : Black | White | Grey


Reflector : Glass

Size : Ø86 x H200mm

IP Rating : IP65

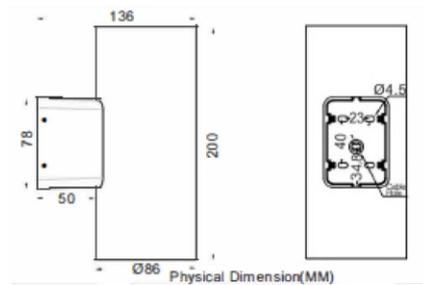

Light Distribution

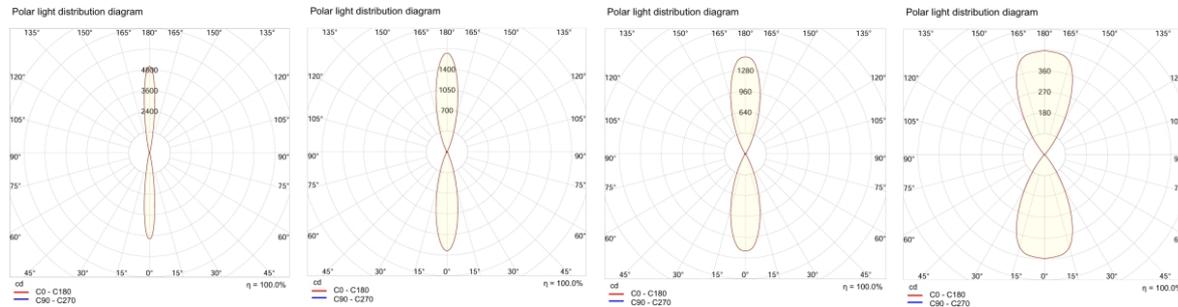

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-ZenithRD-BL04	2x6W 2x10W 2x12W 2x15W	2x600lm 2x1000lm 2x1200lm 2x1500lm	2700K 3000K 4000K 6500K	90	15° 24° 36° 60°	White Black Grey	Ø86 x H200mm	

ZENITH SQUARE | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.

Technical Details

- Power : 2x6W | 2x9W | 2x12W

- CCT : 2700K | 3000K | 4000K | 6500K | Red | Green | Blue | Yellow | Amber

- CRI : 90

- Beam Angle : 12° | 25° | 40° | 60°

- Lumen Output : 2x600lm | 2x900lm | 2x1200lm

- Input Voltage : AC 220-240V

- Driver : 1-10V | DALI | DMX


- Material : Aluminum

- Finishing Color : Black | White | Grey


- Reflector : Glass

- Size : Ø86 x H200mm

- IP Rating : IP65

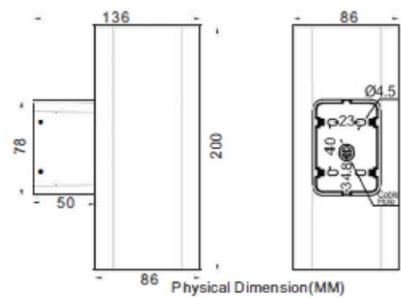

Light Distribution

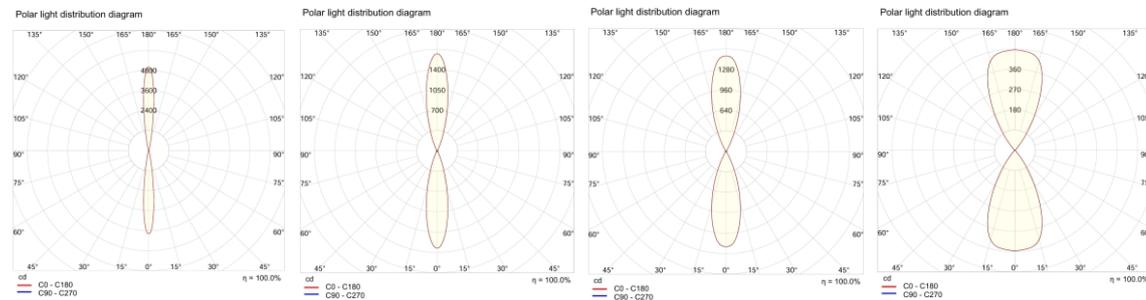

Light Performance




Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-ZenithSQ-BL04	2x6W 2x9W 2x12W	2x600lm 2x900lm 2x1200lm	2700K 3000K 4000K 6500K Red Green Blue Yellow Amber	90	12° 25° 40° 60°	White Black Grey	Ø86 x H200mm	

RETRO | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.

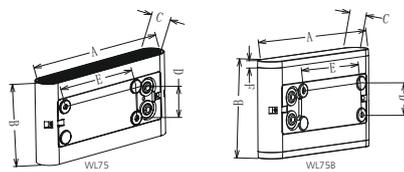

Technical Details

Power : 2x3W | 2x5W

CCT : 3000K | 4000K | 5700K

CRI : 80

Beam Angle : 29°x77°x8°

Lumen Output : 530lm | 940lm

Input Voltage : AC 220-240V

Material : Aluminum


Finishing Color : Black | White

Reflector : PC Lens


Size : L135 x W90 x H30.5mm

IP Rating : IP65

Light Distribution



Light Performance

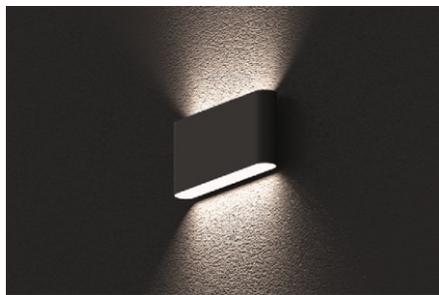


Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-Retro-US01	2x3W 2x5W	530lm 940lm	3000K 4000K 5700K	80	29°x77°x8°	White Black	L135 x W90 x H30.5mm	

SPRING | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.

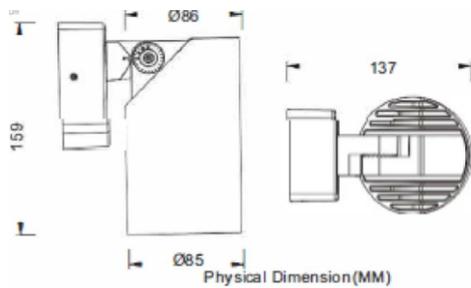

Technical Details

Power : 15W | 20W

CCT : 2700K | 3000K | 4000K | 5700K

CRI : 90

Beam Angle : 15° | 24° | 36° | 60°

Lumen Output : 1500lm | 2000lm

Input Voltage : AC 220-240V

Driver : 1-10V | DALI | DMX

Material : Aluminum


Finishing Color : Black | White | Grey

Reflector : Lens


Size : Ø85 x H159mm

IP Rating : IP65

Light Distribution

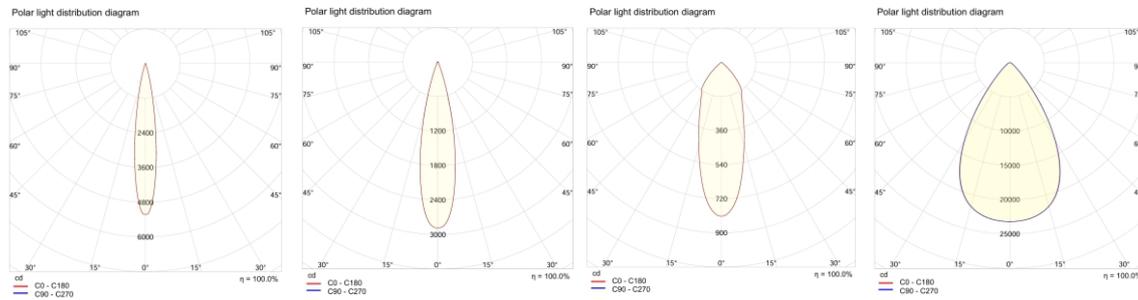

Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-Spring-BL04	15W 20W	1500lm 2000lm	2700K 3000K 4000K 5700K	90	15° 24° 36° 60°	White Black Grey	Ø85 x H159mm	

ZODIAC | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.

Technical Details

Power : 10W | 15W

CCT : 3000K | 4000K | 5000K

CRI : 90

Beam Angle : 60°x115°

Lumen Output : 600lm | 850lm

Input Voltage : AC 220-240V

Driver : Triac


Material : Die cast aluminum

Finishing Color : Black | White



Reflector : PC

Size : L200 x W100 x H60mm | L300 x W100 x H60mm

IP Rating : IP65

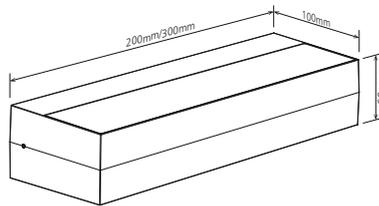

Light Distribution



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-Zodiac-US01	10W 15W	600lm 850lm	3000K 4000K 5000K	90	60°x115°	White Black	L200 x W100 x H60mm L300 x W100 x H60mm	

LUNAR | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.

Technical Details

Power : 10W

CCT : 3000K | 4000K | 5700K

CRI : 80

Beam Angle : Adjustable 15°- 120°

Lumen Output : 750lm

Input Voltage : AC 220-240V


Material : Aluminum/PC

Finishing Color : Black

Reflector : PC


Size : L120 x W96.8 x H100mm

IP Rating : IP65



Light Distribution

Polar light distribution diagram



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-Lunar-GR17	10W	750lm	3000K 4000K 5700K	80	15°-120°	Black	L120 x W96.8 x H100mm	



VOYEGAR | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.


Technical Details

Power : 40W
CCT : 5000K
CRI : 70
Beam Angle : -
Lumen Output : 4303lm
Input Voltage : AC 120-277V
Material : Die cast aluminum
Finishing Color : Bronze
Reflector : Heat and impact resistant borosilicate glass
Size : L340mm x W236mm x H181mm
IP Rating : IP65



Light Distribution

Polar light distribution diagram




Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-Voyegar-GR17	40W	4303lm	5000K	70		Bronze	L340mm x W236mm x H181mm	

DISC | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.

Technical Details

Power : 6W | 10W

CCT : 2700K | 3000K | 4000K | 6500K

CRI : 90

Beam Angle : Asymmetric

Lumen Output : 300lm | 500lm


Input Voltage : AC 220-240V

Material : Aluminum

Finishing Color : Black | Grey


Size : Ø150 x H35mm | Ø220 x H37mm

IP Rating : IP65



Light Distribution

Polar light distribution diagram



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-Disc-AM03	6W 7W	300lm 500lm	2700K 3000K 4000K 6500K	90	Asymmetric	Black Grey	Ø150 x H35mm Ø220 x H37mm	

FLOPPY | WallLights Surface



The Surface Mounted Outdoor Wall Light is a durable and stylish lighting fixture designed for exterior applications. It provides efficient and uniform illumination to enhance building facades, pathways, and entrance areas. Constructed with high-quality die-cast aluminum housing and a corrosion-resistant powder-coated finish, it ensures long-lasting performance in harsh outdoor conditions.

Technical Details

Power : 6W | 10W

CCT : 2700K | 3000K | 4000K | 6500K

CRI : 90

Beam Angle : Asymmetric

Lumen Output : 300lm | 500lm


Input Voltage : AC 220-240V

Material : Aluminum

Finishing Color : Black | Grey

Size : L150 x W150 x H35mm | L220 x W220 x H37mm

IP Rating : IP65



150




35

150

Light Distribution

Polar light distribution diagram



Light Performance



Order Options

Model Code	Power	Lumens	CCT	CRI	Beam	Finish	Size	Accessories
WS-Floppy-AM03	6W 7W	300lm 500lm	2700K 3000K 4000K 6500K	90	Asymmetric	Black Grey	Ø150 x H35mm Ø220 x H37mm	